



1. Model SB 400 PRO

SB 400 PRO

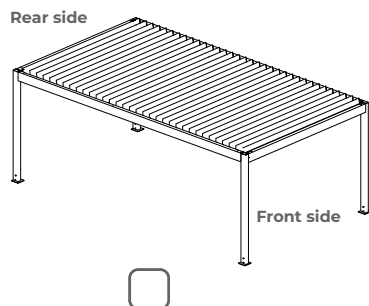

Model SB 400 PRO R

SB 400 PRO R

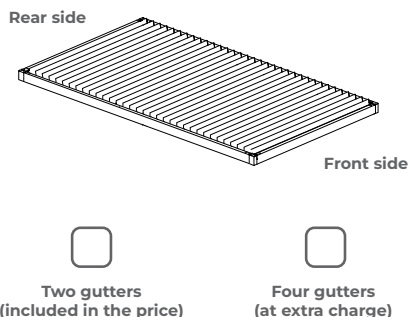

DRAINAGE FROM GUTTERS

Prepared in the gutter from left/right No holes (only drainage)	Drainage hole made at a distance of [...] from the rear to the axis of the hole
1	1 mm
2	2 mm
3	3 mm
4	4 mm

* za dopłatą odpływ tworzywowy

2. Variant of pergola




Freestanding




Wall mounting


Wall mounting side




Drainage side




3. Modules?



Single

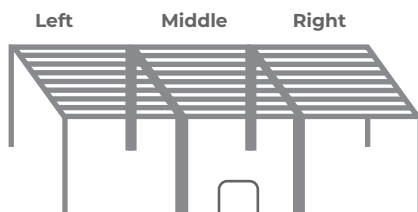

Modules connected along the projection/length



Modules connected across the width

4. Colors

Construction Slats


- | | | |
|--------------------------|---------------------|--------------------------|
| ☐ | Ral 9016 mat | ☐ |
| ☐ | FSM 71319 struktura | ☐ |
| ☐ | RAL 7016 mat | ☐ |

Other RAL construction colour*

Other RAL* colour of slats


* for an extra charge

5. Drainage cover colours



- | | |
|----------|--------------------------|
| White | ☐ |
| Black | ☐ |
| 7016 mat | ☐ |


6. Direction of slats opening

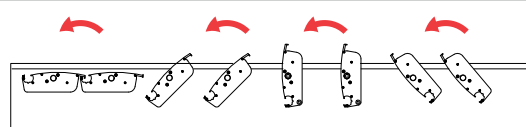

Rear side

Front side

Counterclockwise opening direction

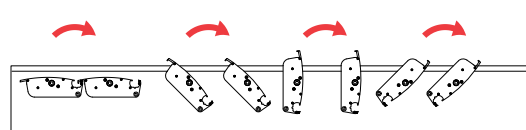

Rear side

Front side

Clockwise opening direction


7. Roof Slant

- | | |
|--------------------------|--------------------------------|
| ☐ | Flat/even Roof * |
| ☐ | Slanted roof FROM the motor ** |

* As a standard we produce the Flat/even Roof


** Height difference between the ends of the roof blade is 15mm

8. Feets:




MARK THE DIRECTION OF WATER DRAINAGE

* Drainage on the wider side of the column at extra cost

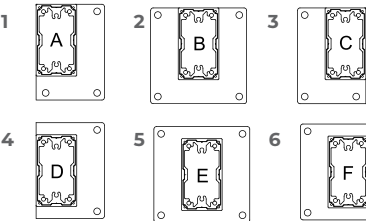

8 **X**-LACK OF POST
9 **M**- ATTACHMENT TO THE WALL

Z- FLUSH FOOT



R -ADJUSTABLE FOOT

10. Dimensions

No.	Width max 4000 mm	Projection/ Length max 7000 mm	Clear height max 2800 mm	Motor side left/right	Wall mounting side Left/ Right- Front/ Back	Drainage side Left/ Right Front/ Back	Module: 1. Single 2. Left / Middle / Right 3. Front / Middle / Rear	Additional column Left/ Right Front/ Back	additional column placed symmetrically or the distance from the additional column ***
1									
2									
3									
4									

11. Type of electric control

Somfy Tilt 24V motor
Blade rotation 0 - 110°±5°
Somfy unit control panel
IO Louver,
5k IO remote control,
INCLUDED IN THE PRICE
OF THE PERGOLA

10. led lighting

- ☐ LED 3200K COB
- ☐ Light points in the blades 3300K
- ☐ LED 4000K COB



*** ADDITIONAL RIGHT AND LEFT COLUMNS DISTANCE TO THE REAR COLUMN
ADDITIONAL FRONT AND REAR COLUMNS DISTANCE TO THE LEFT-HAND COLUMN

IN THE WALL VERSION IT IS THE DISTANCE FROM THE ADDITIONAL POST TO THE END OF THE PERGOLA

Other electronic devices

Delivery address:

Remarks:

The Buyer declares that he/she knows the English language and understands the declarations made and accepted in the Czech language. He understands his order, has read and agrees to the General Terms and Conditions, General Warranty Conditions, technical and operational documentation and Declaration of Performance. For outdoor systems, the Declaration of Conformity for motorized systems and Information for the installation of safety features for indoor chain and cord systems are available at: www.selt.com/dte-en

Signature

Customer

Date