



R85 ORDER FORM

R85	MAXIMUM DIMENSIONS	MINIMUM WIDTH				WHITE	GREY	DARK ANTHRACITE	TRANSPARENT	ELECTRIC DRIVE	MECHANICAL STOPS	ELECTRONIC STOPS	RATIO	STANDARD	ELERO	SOMFY	SOMFY SONESSE
Chain drive system																	
MANUAL *	2,5x 3,0	0,7				Cassette plastic end caps' colour											
SEMI AUTOMAT *	2,2x 2,5	1,1				Mounting bracket up to 1,5m width 2pcs., more than 1,5m 3pcs.											
Electric drive system																	
AUTOMAT	2,6x 2,6	0,7				Chain drive type system			Chain and plastic connectors								
						Chain safety bracket											

SELT COLLECTION COLOURS	BEIGE				WHITE				LIGHT GREY				DARK GREY				ANTHRACITE		BLACK	BROWN		RED	BLUE	YELLOW		
	VSR 240	RAL 1015	RAL 1013	RAL 9001	RAL 9010	RAL 9016	RAL 7035	RAL 9006	RAL 7001	RAL 7037	RAL 9007	RAL 7012	DB 703	FSM 71319	RAL 7015	RAL 7024	RAL 7016	RAL 7021	RAL 9005	RAL 8014	RAL 8016	VSR 780	RAL 3004	RAL 5014	RAL 1006	
SYSTEM CONSTRUCTION																										

FABRIC	SOLTIS 99	VEROGLIM Acoustics	SUNWORKER	SOLTIS 92	SCREEN 350	R85 AUTOMAT		SCREEN 550 H max 2,5 m	FABRIC COLOUR AND NUMBER										METALISATION		OTHER RAL COLOUR						
						SERGE 600	SERGE 1%																				

** total external dimensions required.

REMARKS

No.	TOTAL** WIDTH mm	HEIGHT mm	QUANTITY pcs.	DRIVE SIDE	Chain's loop	REMARKS
					240 cm 360 cm	
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						
11						
12						
13						
14						
15						
16						

ELECTRIC CONTROL ORDER FORM ATTACHED refers to R85AUTOMAT

*) THE BUYER HAS BEEN INFORMED OF THE NECESSITY TO INSTALL THE SAFETY ELEMENTS PREVENTING FROM THE RISK OF STRANGULATION BY THE LOOP refers to MANUAL and SEMI AUTOMAT systems



CHAIN'S LENGTH SELECTION ADVICE FOR R85 MA SA SYSTEMS:

The chain is provided in a 240 cm or 360 cm loop.
For 240 cm distance between a chain and the floor is CASSETTE'S MOUNTING HEIGHT - 120 cm.
For 360 cm distance between a chain and the floor is CASSETTE'S MOUNTING HEIGHT - 180 cm.
Chain must be mounted at a height not less than 150 cm above the floor. The set contains: a chain safety bracket, two chain's connectors that enable reducing the length of the chain and can be also used as the end stops.

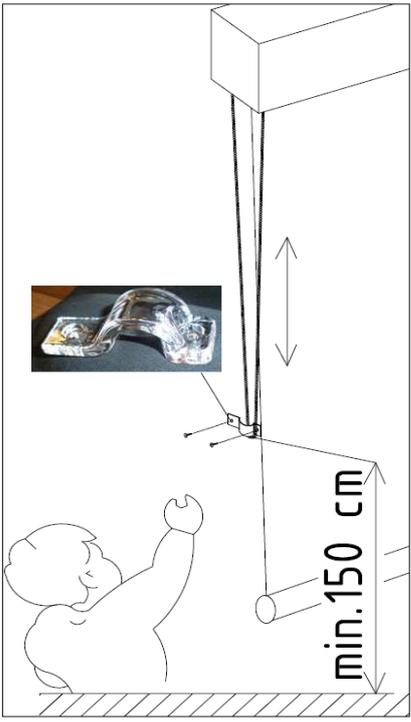
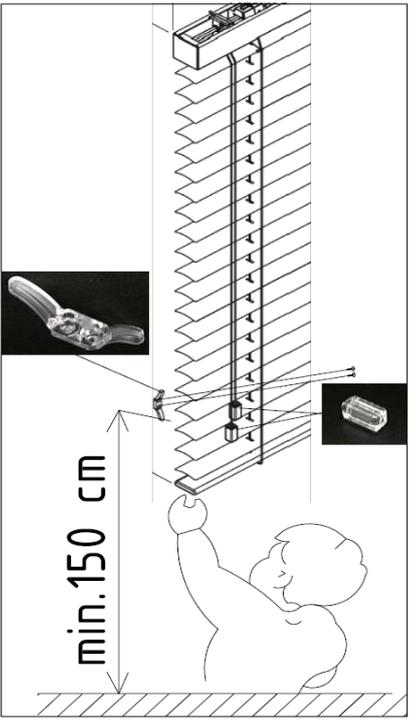
DELIVERY ADDRESS	<p>The Buyer hereby declares that they speak fluent English, understand the statements received and submitted in English, orders submitted, and to have read and accepted General Sales Terms and Conditions, General Warranty Terms and Conditions, Technical-operational documentation and Declaration of performance for external systems, Declaration of Conformity for systems with motor drive and information on safety elements installation for internal systems operated with cord and ball chain, available at https://www.selt.com/dokumenty-en.</p> <p>ORDERING COMPANY, DATE, SIGNATURE</p>
------------------	---

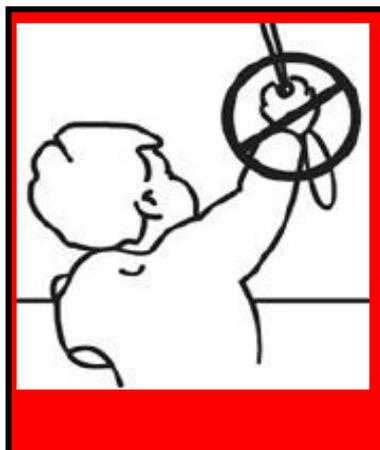
INFORMATION ON SAFETY ELEMENTS INSTALLATION

Young children can be strangled when the safety device is not installed and adjusted. Read carefully the instructions and install accordingly.

Elements preventing strangulation available at SELT Sp. z o.o.

		
SLIM cord bracket	Chain security grip	Cord ending

<p>INSTALLATION MANUAL</p>			<p>Endings of operation cords were finished with PVC elements (cord endings) to prevent the cords from twisting and creating a loop.</p>
----------------------------	--	---	--



WARNING

- Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product.
- To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck.
- Move beds, cots and furniture away from window covering cords. Do not tie cords together. Make sure cords do not twist.