


Order form

Pergola SB 400

Subject order no.


1. Model SB 400

SB 400

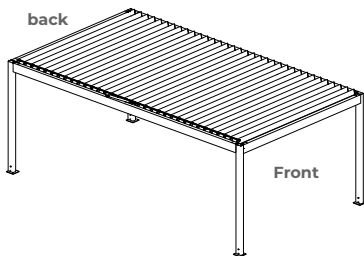

SB 400R

*Without drainage from the gutter,
water drainage to be made on your own.
Mark the opposite sides of the wall mounting.



Two gutters
(included in the price)



Four gutters
(at extra charge)


2. Variant of pergola



☐
Free-standing
4 poles





☐
Wall-mounted
2 poles




☐
Universal
wall bracket type

Wall attachment side


Drainage side




3. Is the product in modular version?



☐
Single

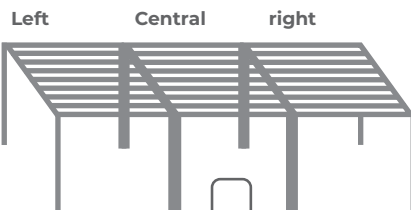

☐
Modules connected at the
overhang/length of the pergola



☐
Modules connected across
the width of the pergola

4. colours

Construction

Blades



Ral 9016 mat



FSM 71319
struktura



RAL 7016 mat




Other RAL* **Construction**

Different colour RAL* **Blades**

* at extra charge

5. The colors of the mask




White ☐

black ☐

7016 mat ☐

6. Direction of blades opening



back

Front



counter-clockwise direction of blade opening



back

Front



the blades open in a clockwise direction

7. Roof Slant



Flat/even Roof



Slanted roof TOWARDS
the motor





Slanted roof FROM
the motor *

* As a standard we produce
the slanted roof FROM the motor


** Height difference between
the ends of the roof blade is 20mm

7. Feet:


Feet without drainage



Feet with drainage




7. Enter the type of foot in the appropriate white boxes for every ordered module (max. 4 on one form)

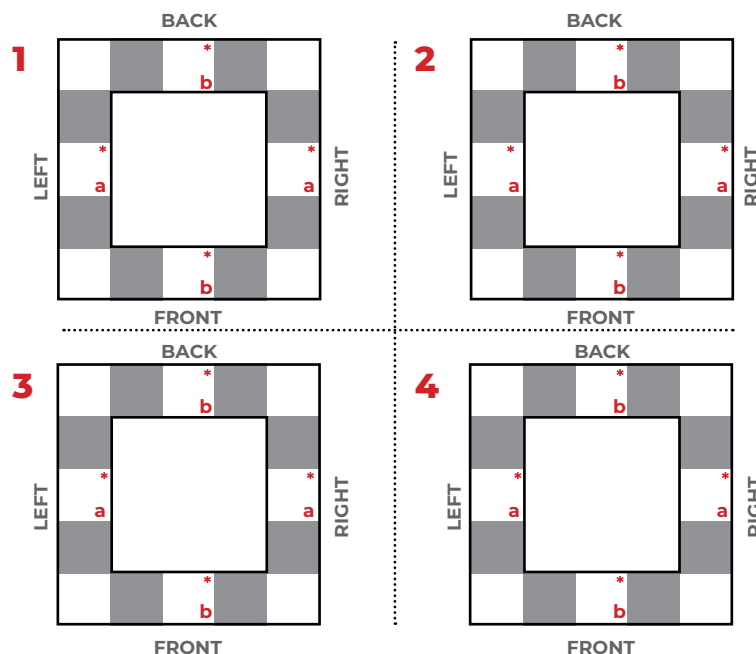

ADDITIONAL POLES AT EXTRA CHARGE, WITHOUT DRAINAGE

ADDITIONAL POLES ORIENTATION



*** DISTANCE BETWEEN POLES INTERMEDIATE POLES LEFT AND RIGHT CLEARANCE TO REAR POLE

INTERMEDIATE POLES FRONT AND REAR CLEARANCE TO THE LEFT-HAND POST



IN THE WALL MOUNTED VERSION, WITHOUT E.G. REAR POSTS, THE DISTANCE MEASURED FROM THE INTERMEDIATE POLE TO THE END OF THE PERGOLA

8. Dimensions

No.	Width max 4000 mm	Overhang/length max 7000 mm	Clear height max 2800 mm	Engine side left/ right	Wall attachment side left/right front/rear	Drainage side left/ right front/rear	Module: 1.single 2.left/centre/right 3. front/centre/rear	Intermediate pole left/ right front/ rear	Intermediate pole SYMMETRICALLY or specify the distance of the intermediate column ***
1									
2									
3									
4									

9 Controlling

☐ Engine Picolo 230V 0-90°
☐ Somfy slim RTS
☐ Remote control 5k RTS
☐ Somfy slim IO
☐ Remote control 5k IO
☐ Elero Combio 868
☐ Remote control 5k Elero
☐ Engine Pergola 24V 0-120°
☐ Somfy IO Louver
☐ Remote control 5k IO

10. led lighting


☐ Led strip around inner perimeter of pergola (4000-4500K)
☐ Light points in the blades* 3300K

* radio receiver compatible with selected control unit included in price

11. Led control

☐ Mi light + Pilot (w cenie)
☐ Somfy white Led Receiver IO
☐ Somfy Lighting Slim Receiver RTS
☐ Elero Combio 868 LI

12. Led power supply mounting mounting pol



Additional automation, remote controls/sensors, etc.

Delivery address

Notes

The Buyer declares that he is fluent in English, understands the statements made and received in English. He understands his order and has read and accepts the General Terms and Conditions of Sale, the General Terms and Conditions of Guarantee and the Technical and Operational Documentation and the Declaration of Performance. For outdoor systems, the Declaration of Conformity and for motorised systems and the information for the installation of the safety components for indoor chain and cord systems, available at: www.selt.com/dte-en

Signature

Orderer

Date