


## ORDER FORM SUNBREAKER 210 ROTARY VERTICAL

Refers to order no:	


1. Select the type of blade and plugs

ТУРА	·(G) •	universal
ТҮР В	•®• universal*	•®•  TYP B

## 2. Select drive type




3. On which blade is to be mounted the lever for the drive, counting from the bottom

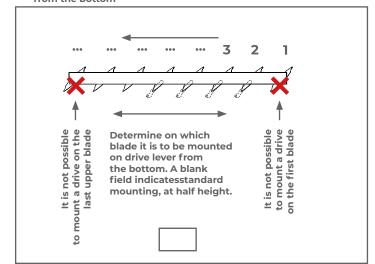

4. Colour select

		BE	IGE		Wi	HITE		DARK	GRE	Y			ANT	HRA	CITS				BL	ACK		BLACK	E	BRO\	WNE	S	OTHER COLOUR RAL
COLOUR FROM THE SELT COLLECTION	VSR 240	RAL 1015	RAL 1013	RAL 9001	RAL 9010	RAL 9016	RAL 7035	RAL 9006	RAL 7001	RAL 7037	RAL 9007	RAL 7012	DB 703	FSM 71319	RAL 7015	RAL 7039	RAL 7024	RAL 7016	RAL 7021	RAL 7043	RAL 7022	RAL 9005	RAL 8014	RAL 8016	VSR 780	RAL 8003	
Construction Colour																											
Colour of plastics																											

## 5. Automation




5.2. Somfy RTS radio control									
	Remote control receiver flush mounted Universal Receiver RTS (FD)								
	Remote control receiver Universal Slim Reciver RTS Stak3/Stas3 (FD)								
( · · · · · · · · · · · · · · · · · · ·	Single-channel remote control Situo 1 PURE (FP)								
	Five-channel remote control Situo 5 PURE <b>(FU)</b>								

5.3. Somfy IO radio control							
	Remote control receiver Pergola remote control receiver Slim receiver io (N1)						
	Single-channel remote control Situo 1 io PURE II <mark>(3M)</mark>						
	Five-channel remote control Situo 5 io PURE II (3S)						

<sup>\*</sup>does not cover the entire surface of the blade

**COMPATIBLE** 



Clockwise direction

Top view

View with open lamels

View with open lamels

View with open lamels

**PREVIOUS** 

The above drawing should be interpreted as a front projection of the system.

Mounting of the SUNBREAKER 210 system can be carried out in a niche or on a substructure.

NO FACADE MOUNTING BRACKETS!!!

There is a choice of lamellas that open clockwise or counterclockwise, thus determining the side in which the lamellas open.

8. Specify the dimensions, number and side of the drive and the direction of opening of the lamellas.

QUANTITY [szt.]		WIDTH [mm]	HEIGHT [mm]	DIRECTIONS OF OPENING THE BLADES CLOCKWISE / COUNTECLOCKWISE	DRIVE MANUAL/MOTOR	DRIVE LEVER CONNECTION BLADE NUMBER
1						
2						
3						
4						
5						
6						
7						

Remarks:

Mounting of the SUNBREAKER 210 system can be carried out in a niche or on a substructure. NO FACADE MOUNTING BRACKETS!!!

statem conter accept Terms Operated Terms Docum of Per of Content Declar and the	nents made and received to fee order place to the General Term and Conditions of tional the General Term and Conditions of Generation and the Deformance. In the castion of Conformity in the castion of Conformity the Information Sheet	e is fluent in English. He dand has familiarise s and Conditions of Guarantee and trms and Conditions of uarantee, the Technic eclaration of Perforse of outdoor systeme of for motor-oper in the case of motor for Mounting of Sec d Systems, available aen.	e understands the d himself with and 5 Sale, the General he Technical and of Sale, the General cal and Operational mance. Declaration ated systems, the operated systems, uring Components
SI	GNATURE:	DATE:	SIGNATURE:

Delivery address: