


ORDER FORM SUNBREAKER 210 ROTARY


Refers to order no:	

1. Select the type of blade and plugs




*does not cover the entire surface of the blade

2. Select drive type




3. On which lamella is the drive arm to be mounted, counting from the bottom

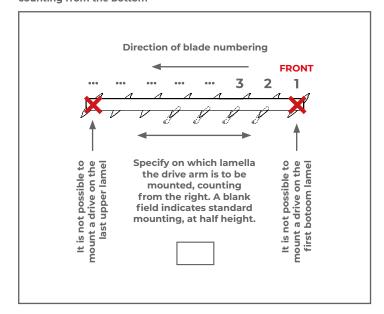

4. Colour select


-1. Goldal Sciede																											
		BE	IGE		Wi	HITE		DARK	GRE	Υ			ANT	HRA	CITS				BL	ACK		BLACK	E	BRO\	WNE	S	OTHER COLOUR RAL
COLOUR FROM THE SELT COLLECTION	VSR 240	RAL 1015	RAL 1013	RAL 9001	RAL 9010	RAL 9016	RAL 7035	RAL 9006	RAL 7001	RAL 7037	RAL 9007	RAL 7012	DB 703	FSM 71319	RAL 7015	RAL 7039	RAL 7024	RAL 7016	RAL 7021	RAL 7043	RAL 7022	RAL 9005	RAL 8014	RAL 8016	VSR 780	RAL 8003	
Construction Colour																											
Colour of plastics																											

5. Automation



5.2. Somfy RTS radio control							
	Remote control receiver flush mounted Universal Receiver RTS (FD)						
	Remote control receiver Universal Slim Reciver RTS Stak3/Stas3 (FD)						
	Single-channel remote control Situo 1 PURE (FP)						
	Five-channel remote control Situo 5 PURE <mark>(FU)</mark>						


5.3. Somfy IO radio control					
	Remote control receiver Pergola remote control receiver Slim receiver io (N1)				
(• • • 1	Single-channel remote control Situo 1 io PURE II (3M)				
	Five-channel remote control Situo 5 io PURE II (3S)				



The above drawing should be interpreted as a front projection of the system.

Mounting of the SUNBREAKER 210 system can be carried out in a niche or on a substructure. NO FACADE MOUNTING BRACKETS!!!

Delivery address:

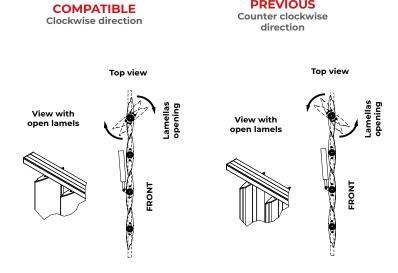

PREVIOUS

There is a choice of lamellas that open clockwise or counterclockwise, thus determining the side in which the lamellas open.

8. Specify the dimensions, number and side of the drive and the direction of opening of the lamellas.

QUANTITY [szt.]		WIDTH [mm]	HEIGHT [mm]	DIRECTIONS OF OPENING THE BLADES CLOCKWISE / COUNTECLOCKWISE	DRIVE MANUAL/MOTOR	DRIVE LEVER CONNECTION BLADE NUMBER
1						
2						
3						
4						
5						
6						
7						

Mounting of the SUNBREAKER 210 system can be carried out in a niche or on a substructure. NO FACADE MOUNTING BRACKETS!!!

st ccc acc Te O Te D of of D	atements made an ontent of the order occepts the General erms and Condition perational the General and Conditions occumentation and the Ferformance. In the Conformity in the celaration of Confor	d received in Engliplaced and has fam Terms and Conditions of Guarantee ral Terms and Conditions of Guarantee, the Tethe Declaration of the case of outdoor case of for motornity in the case of Sheet for Mounting d Cord Systems, ava	English, understands the lish. He understands the liliarised himself with and ons of Sale, the Genera and the Technical and itions of Sale, the Genera fechnical and Operationa Performance. Declaration systems, the Declaration ro-operated systems, the motor-operated systems of Securing Components ilable at:	
	SIGNATURE:	DATE:	SIGNATURE:	

1	Remarks:
1	
1	
1	
1	
1	
1	
1	
1	
1	
1	
1	
1	
1	
1	
1	
1	
1	
1	
1	
1	
1	
1	
1	
1	
1	
١	