

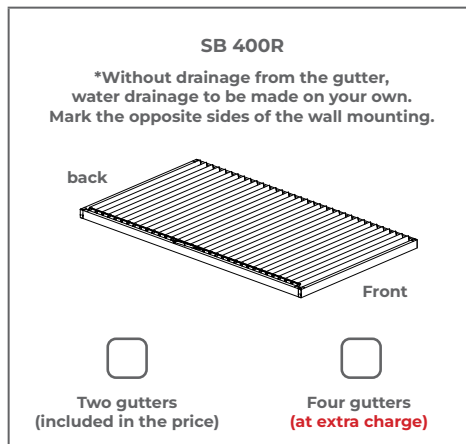
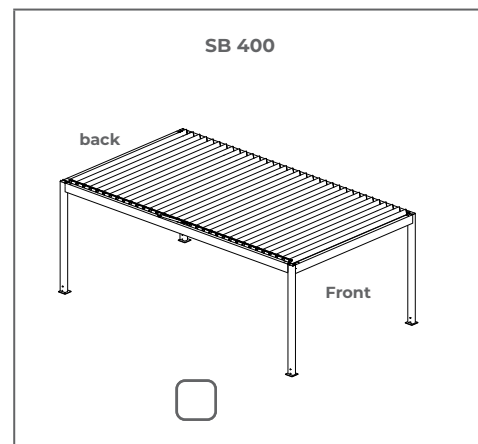


1. Model SB 400



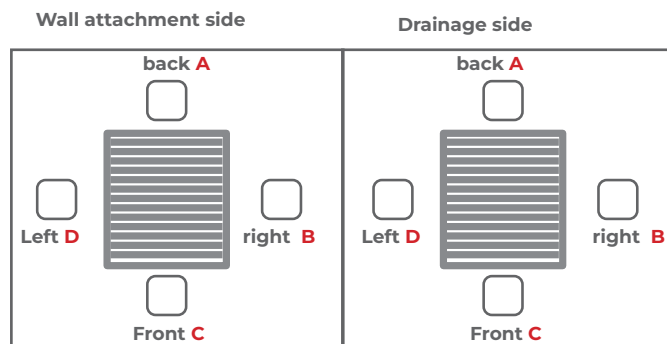


DRAINAGE FROM GUTTERS	
Prepared in the gutter from left/right No holes (only drainage)	Drainage hole made at a distance of [...] from the rear to the axis of the hole
1	1 mm
2	2 mm
3	3 mm
4	4 mm
*Plastic drain for extra charge	

2. Variant of pergola

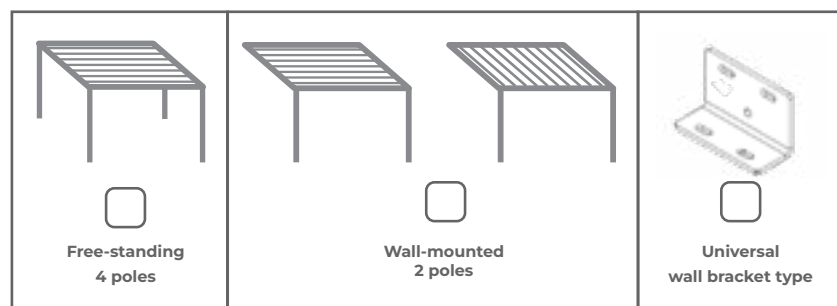

3. Is the product in modular version?

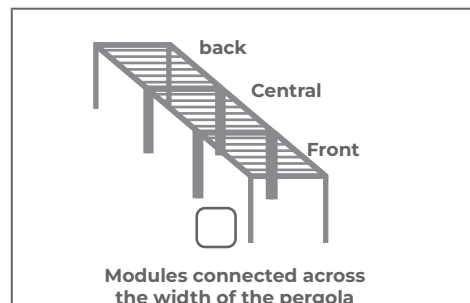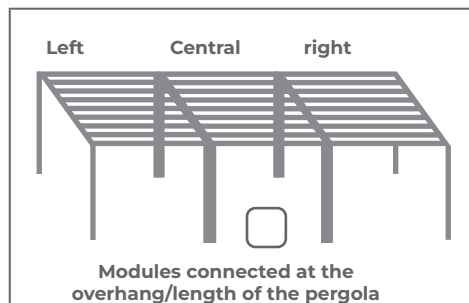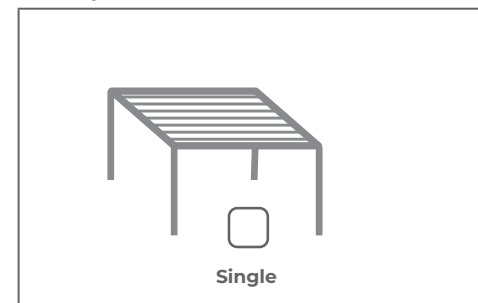


4. colours


Construction	Blades
☐ Ral 9016 mat	☐
☐ FSM 71319 struktura	☐
☐ RAL 7016 mat	☐
Other RAL* Construction	
Different colour RAL* Blades	

* at extra charge

5. The colors of the mask

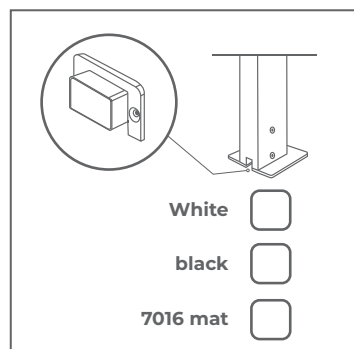


6. Direction of blades opening

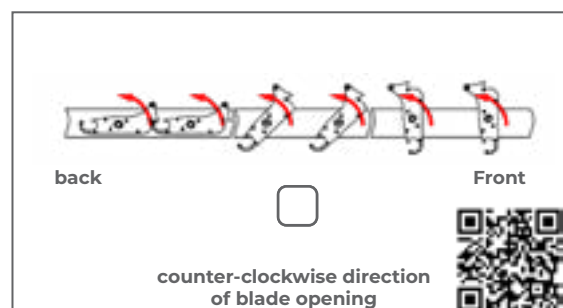


7. Roof Slant

☐	Flat/even Roof
☐	Slanted roof TOWARDS the motor
☐	Slanted roof FROM the motor *
* As a standard we produce the slanted roof FROM the motor	
** Height difference between the ends of the roof blade is 20mm	


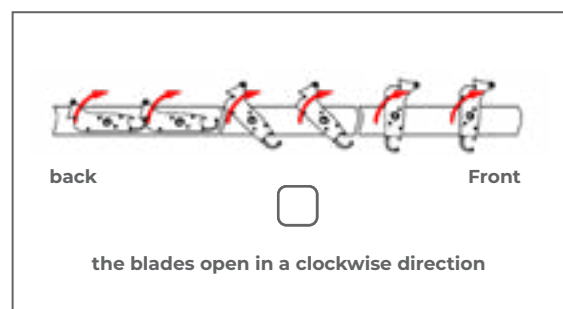


8. Feet:




MARK THE DIRECTION OF WATER DRAINAGE

* Drainage on the wider side of the column at extra cost

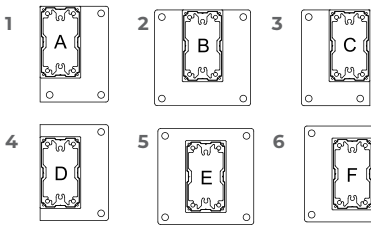





Z- FLUSH FOOT



R -ADJUSTABLE FOOT


9 M- ATTACHMENT TO THE WALL

Enter the foot type in the corresponding white boxes, for each module ordered (max. 4 per form).

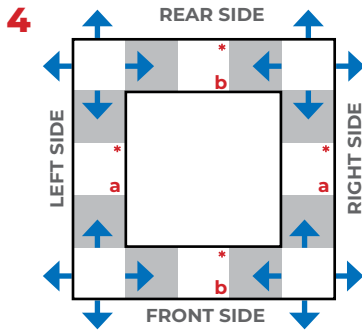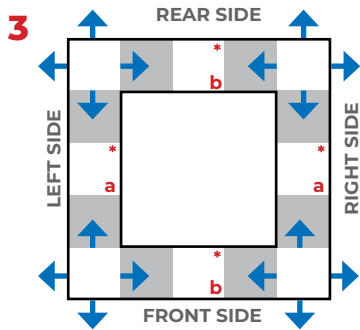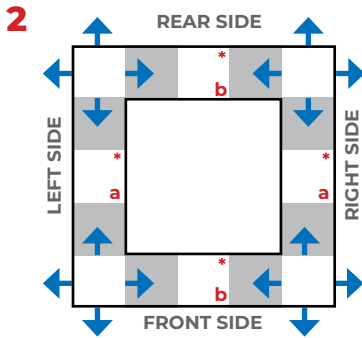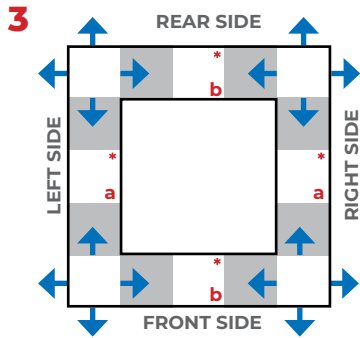

*ADDITIONAL COLUMNS (WITHOUT DRAINAGE) AT EXTRA COST

LOCATION OF ADDITIONAL POSTS



*** DISTANCE BETWEEN POLES
INTERMEDIATE POLES LEFT AND RIGHT
CLEARANCE TO REAR POLE

INTERMEDIATE POLES FRONT AND REAR
CLEARANCE TO THE LEFT-HAND POST



IN THE WALL MOUNTED VERSION,
WITHOUT E.G. REAR POSTS,
THE DISTANCE MEASURED FROM
THE INTERMEDIATE POLE TO
THE END OF THE PERGOLA

10. Dimensions

No.	Width max 4000 mm	Overhang/length max 7000 mm	Clear height max 2800 mm	Engine side left/ right	Wall attachment side left/right front/rear	Drainage side left/ right front/rear	Module: 1.single 2.left/centre/right 3. front/centre/rear	Intermediate pole left/ right front/ rear	Intermediate pole SYMMETRICALLY or specify the distance of the intermediate column ***
1									
2									
3									
4									

11. Controlling

☐ ***Engine Picolo
230V 0°-120°±5°

☐ ***Engine Picolo
230V 0°-110°±5°

☐ Engine Pergola
24V 0-120°

☐ *Somfy
slim RTS

☐ *Somfy
slim IO

☐ *Elero Combio
868

☐ **Driver BLEBOX

☐ *Pilot
5k RTS

☐ *Pilot
5k IO

☐ *Pilot 5k
Elero

☐ **Pilot BLEBOX

* control available at extra charge

*** sloped/inclined roof from motor

** control included in the price

**** flat/straight roof, sloped/inclined roof towards motor

☐ Additional Revision in the beam behind the engine bracket

Additional automation, remote controls/sensors, etc.

Delivery address

The Buyer declares that he is fluent in English, understands the statements made and received in English. He understands his order and has read and accepts the General Terms and Conditions of Sale, the General Terms and Conditions of Guarantee and the Technical and Operational Documentation and the Declaration of Performance. For outdoor systems, the Declaration of Conformity and for motorised systems and the information for the installation of the safety components for indoor chain and cord systems, available at: www.selt.com/dte-en

Signature

Orderer

Date

12. Led lighting

☐ LED
3200K
COB

LED strip on
the inner
perimeter of
the pergola

☐ LED
4000K
COB

☐ *Light points
in feathers 3300K

* radio receiver compatible
with selected control
included in price

13. Led control

☐ Mi light + Remote
rfyrycontrol (included)


☐ Somfy white
Led Receiver IO

☐ Somfy
Lighting Slim
Receiver RTS

☐ Elero Combio
868 LI

☐ BLEBOX W Light
BOX PRO

14. LED power supply mount, mounting pole



Notes