


Order form

Pergola SB 400



Subject order no.

1. Model SB 400

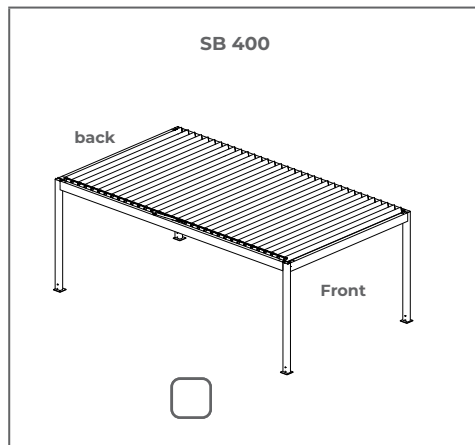


DRAINAGE FROM GUTTERS	
Prepared in the gutter from left/right No holes (only drainage)	Drainage hole made at a distance of [...] from the rear to the axis of the hole
1	1 mm
2	2 mm
3	3 mm
4	4 mm
*Plastic drain for extra charge	

2. Variant of pergola

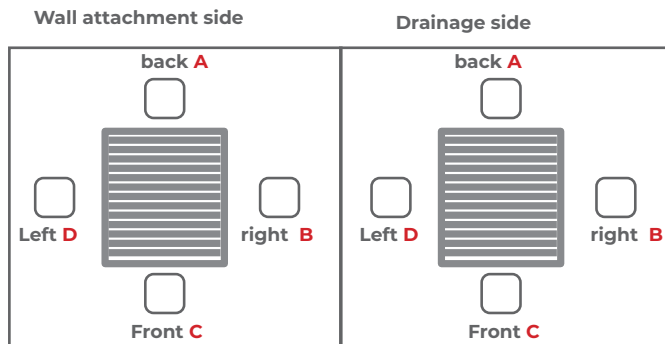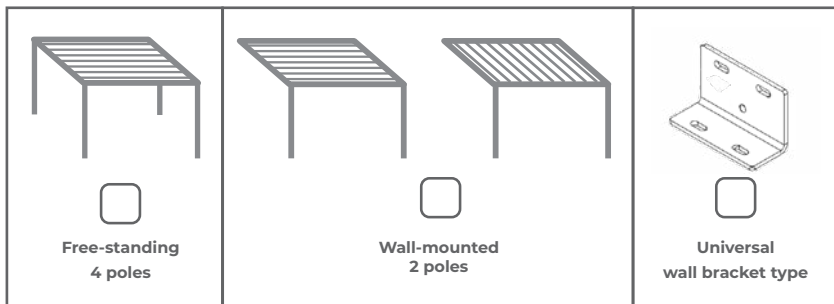

3. Is the product in modular version?

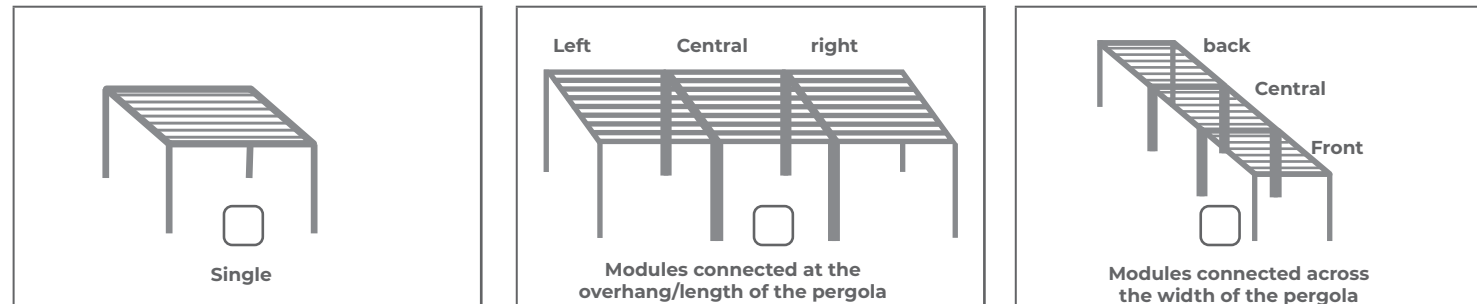


4. colours

Construction	Blades
<input type="checkbox"/> Ral 9016 mat	<input type="checkbox"/>
<input type="checkbox"/> FSM 71319 struktura	<input type="checkbox"/>
<input type="checkbox"/> RAL 7016 mat	<input type="checkbox"/>
Other RAL* Construction	
<input type="text"/>	
Different colour RAL* Blades	
<input type="text"/>	

* at extra charge


5. The colors of the mask

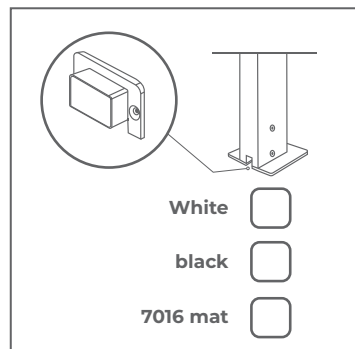


7. Roof Slant

<input type="checkbox"/>	Flat/even Roof
<input type="checkbox"/>	Slanted roof TOWARDS the motor
<input type="checkbox"/>	Slanted roof FROM the motor *
* As a standard we produce the slanted roof FROM the motor	
** Height difference between the ends of the roof blade is 20mm	

6. Direction of blades opening


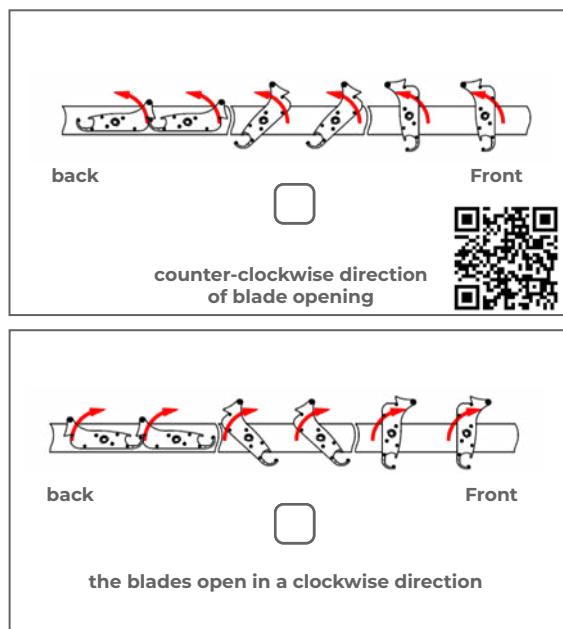


8. Feet:




MARK THE DIRECTION OF WATER DRAINAGE

* Drainage on the wider side of the column at extra cost

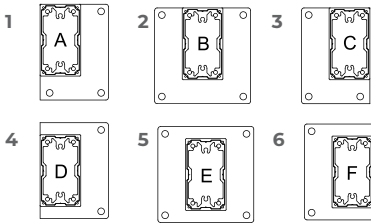





9 **M**- ATTACHMENT TO THE WALL

Z- FLUSH FOOT




R -ADJUSTABLE FOOT

Enter the foot type in the corresponding white boxes, for each module ordered (max. 4 per form).

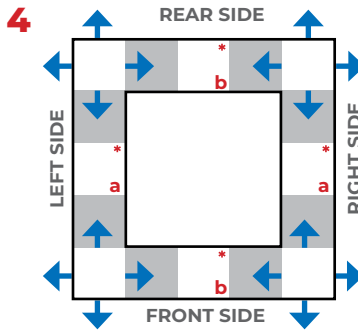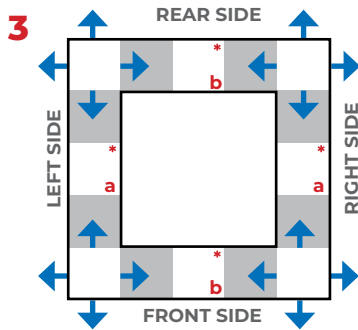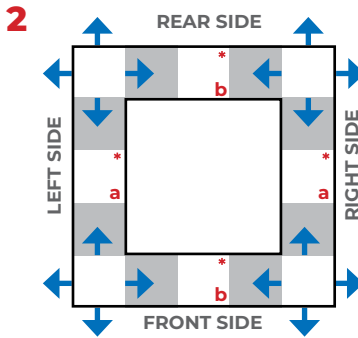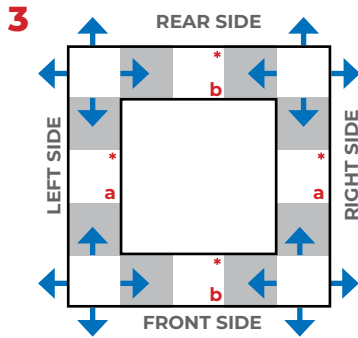

*ADDITIONAL COLUMNS (WITHOUT DRAINAGE) AT EXTRA COST

LOCATION OF ADDITIONAL POSTS



*** DISTANCE BETWEEN POLES
INTERMEDIATE POLES LEFT AND RIGHT
CLEARANCE TO REAR POLE

INTERMEDIATE POLES FRONT AND REAR
CLEARANCE TO THE LEFT-HAND POST



IN THE WALL MOUNTED VERSION,
WITHOUT E.G. REAR POSTS,
THE DISTANCE MEASURED FROM
THE INTERMEDIATE POLE TO
THE END OF THE PERGOLA

10. Dimensions

No.	Width max 4000 mm	Overhang/length max 7000 mm	Clear height max 2800 mm	Engine side left/ right	Wall attachment side left/right front/rear	Drainage side left/ right front/rear	Module: 1.single 2.left/centre/right 3. front/centre/rear	Intermediate pole left/ right front/ rear	Intermediate pole SYMMETRICALLY or specify the distance of the intermediate column ***
1									
2									
3									
4									

11. Controlling

☐ Engine Picolo
230V 0-90°

☐ Engine
Pergola
24V 0-120°

☐ *Somfy
slim RTS

☐ *Somfy
slim IO

☐ * Elero
Combio
868

☐ ** Driver
BLEBOX

☐ *Pilot
5k RTS

☐ *Pilot 5k
IO

☐ * Pilot 5k
Elero

☐ ** Pilot
BLEBOX

* control available at extra charge

** control included in the price

☐ Additional Revision in the beam behind the engine

12. Led lighting

☐ LED strip on
the inner
perimeter of
the pergola

☐ LED
3200K
COB

☐ LED
4000K
COB

☐ Light points
in feathers* 3300K

* radio receiver compatible
with selected control
included in price

13. Led control

☐ Mi light + Remote
rfyrycontrol (included)


☐ Somfy white
Led Receiver IO

☐ Somfy
Lighting Slim
Receiver RTS

☐ Elero Combio
868 LI

☐ BLEBOX W Light
BOX PRO

14. LED power supply mount, mounting pole



Notes

Additional automation, remote controls/sensors, etc.

Delivery address

The Buyer declares that he is fluent in English, understands the statements made and received in English. He understands his order and has read and accepts the General Terms and Conditions of Sale, the General Terms and Conditions of Guarantee and the Technical and Operational Documentation and the Declaration of Performance. For outdoor systems, the Declaration of Conformity and for motorised systems and the information for the installation of the safety components for indoor chain and cord systems, available at: www.selt.com/dte-en

Signature

Orderer

Date