


# Order form

## Pergola SB 500



Subject order no.

### 1. Model SB 500



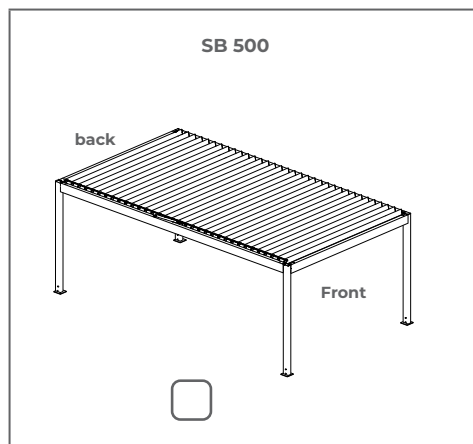


DRAINAGE FROM GUTTERS	
Prepared in the gutter from left/right No holes (only drainage)	Drainage hole made at a distance of [...] from the rear to the axis of the hole
1	1 ..... mm
2	2 ..... mm
3	3 ..... mm
4	4 ..... mm
*Plastic drain for extra charge	

### 2. Variant of pergola

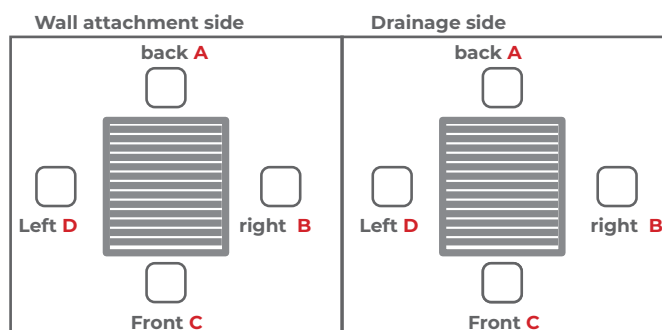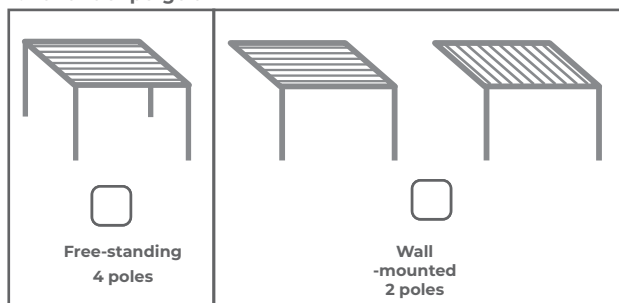

### Is the product in modular version?

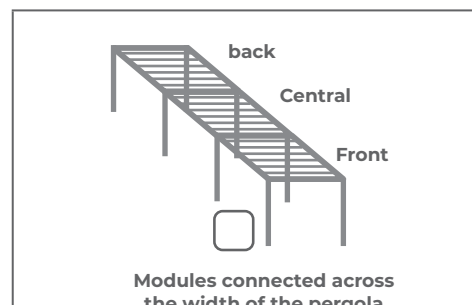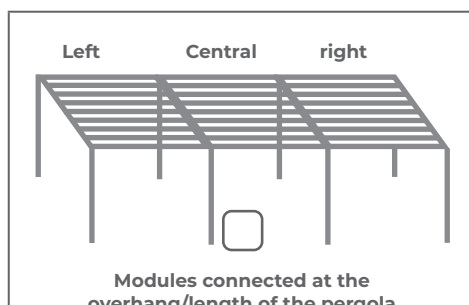
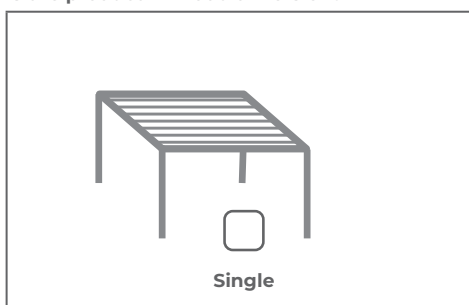


### 4. colours

Construction	Blades
<input type="checkbox"/> Ral 9016 mat	<input type="checkbox"/>
<input type="checkbox"/> FSM 71319 struktura	<input type="checkbox"/>
<input type="checkbox"/> RAL 7016 mat	<input type="checkbox"/>
Other RAL* <b>Construction</b>	
<input type="text"/>	
Inny kolor RAL* <b>Blades</b>	
<input type="text"/>	

\* at extra charge

### 5. Direction of blades opening

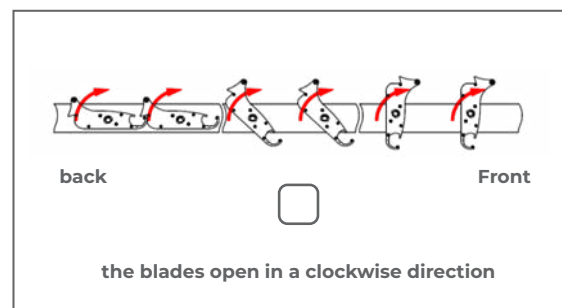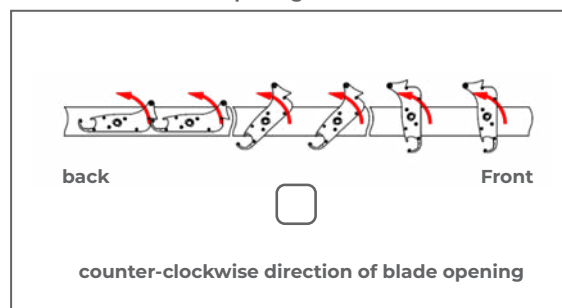

### 6. Roof Slant



<input type="checkbox"/>	Flat/even Roof
<input type="checkbox"/>	Slanted roof TOWARDS the motor**
<input type="checkbox"/>	Slanted roof FROM the motor*

\* As a standard we produce the slanted roof FROM the motor

\*\* Height difference between the ends of the roof blade is 5mm

## 7. Feet

### Feet without drainage



### Feet with drainage



**DIRECTION OF WATER DRAINAGE**

## 8. Enter the type of foot in the appropriate white boxes for every ordered module (max. 4 on one form)

**1**

BACK

LEFT RIGHT

FRONT

**2**

BACK

LEFT RIGHT

FRONT

**3**

BACK

LEFT RIGHT

FRONT

**4**

BACK

LEFT RIGHT

FRONT

ADDITIONAL POLES AT EXTRA CHARGE, WITHOUT DRAINAGE




\*\*\* DISTANCE BETWEEN POLES  
INTERMEDIATE POLES LEFT AND RIGHT  
CLEARANCE TO REAR POLE

INTERMEDIATE POLES FRONT AND REAR  
CLEARANCE TO THE LEFT-HAND POST



IN THE WALL MOUNTED VERSION,  
WITHOUT E.G. REAR POSTS,  
THE DISTANCE MEASURED FROM  
THE INTERMEDIATE POLE TO  
THE END OF THE PERGOLA

## 9. Dimensions

No.	Width max 5000mm	Overhang/ length max 7000mm	Clear height max 3200mm	Engine side left/ right	Wall attach- ment side  Left/Right/ Front/Rear	Drainage side  Left/ Right Front/ Rear	Module:  1.Single 2.Left/centre/Right 3. Front/centre/Rear  ** one leg on the joint overhang - 150 mm (one beam at joint)	Intermediate pole  Left/ Right / Front/ Rear	Intermediate pole SYMMETRICALLY   or specify the distance of the intermediate column ***
1									
2									
3									
4									

## 10. Controlling

☐ Engine Picolo  
230V 0-90°

☐ Engine Pergola  
24V 0-120°

☐ Pergola 12  
V motor +  
SOLAR set

☐ Somfy slim RTS

☐ Somfy slim IO

☐ Elero Combio  
868

☐ Somfy IO Louver

☐ Remote control  
5k RTS

☐ Remote control  
5k IO

☐ Remote control  
5k Elero

☐ Remote control  
5k IO

## 11. led lighting

☐ Led strip around inner  
perimeter of pergola  
3200K COB

☐ Led strip around inner  
perimeter of pergola  
4000K COB

☐ Light points  
in the blades\*  
3300K COB

\* radio receiver compatible  
with selected control unit  
included in price

## 12. Led control

☐ Mi light + Pilot  
(in price)

☐ Somfy white  
Led Receiver IO

☐ Somfy  
Lighting Slim  
Receiver RTS

☐ Elero Combio 868 LI

## 13. Led power supply mounting mounting pol

BACK

LEFT RIGHT

FRONT

Additional automation, remote controls/sensors, etc.

Delivery address

Notes

The Buyer declares that he is fluent in English, understands the statements made and received in English. He understands his order and has read and accepts the General Terms and Conditions of Sale, the General Terms and Conditions of Guarantee and the Technical and Operational Documentation and the Declaration of Performance. For outdoor systems, the Declaration of Conformity and for motorised systems and the information for the installation of the safety components for indoor chain and cord systems, available at: [www.selt.com](http://www.selt.com)

Signature

Orderer

Date