XXL, XL, XS **ORDER FORM**

CHAIN'S LENGTH SELLECTION ADVICE FOR XL MA SYSTEM
The chain is provided in a 240 cm or 360 cm or 460 cm loop.
For 240 cm distance between a chain and the floor is CASSETTE'S MOUNTING HEIGHT - 120 cm.

For 360 cm distance between a chain and the floor is CASSETTE'S MOUNTING HEIGHT - 180 cm.
For 460 cm distance between a chain and the floor is CASSETTE'S MOUNTING HEIGHT - 230 cm.

Chain must be mounted at a height not less than 150 cm above the floor. The set contains: a chain safety bracket, two chain's connectors that enable reducing the length of the chain and can be also used as the end stops.

0)/(0		_				INTER	NAL OR	MA	MANUAL DRIVE			IECIOIS III	at enable	reducing i	ne lengui	i oi tile o	hain and can be	aiso usec	as life e	siiu stops	•				
SYS	TEM		INTERNAL USE				EXTERNAL		CRANK								TOPS		TOPS		RD	0	\	SSE	
SIDE GUIDE		SN	no side guide				S	Cable Ø2,5		3LE					ELECTRIC DRIV			MECHANICAL STOPS	ELECTRONIC STOPS	RATIO	STANDARD	ELERO	SOMFY	SOMFY SONESSE internal use	
		NSIO					NSIO	0	FIXED	СНАВ	CHAIN *						AXIS				DM45S	VariEco	JET		
BOTTOM		MAXIMUM DIMENSIONS	FP33 ===	(*)	fi42 (FG42 (AE)	MAXIMUM DIMENSIONS	fi42 (}	12	DETACHABLE	- 동	000			and XL		NEMO WT		Х		DAMETATE	SUNTOP 868	ALTUS WT		
				fi35 (Х	DWH3EAP13	SUNTOF 606	ALTUS RTS		
														0)				NEMO IO			Х	DM35S	VariEco S	SUNILUS io	SONESSE 40
AAL		4,5x 5,0					3,0x 3,0										A)	(IS SMALL	X			DM35S/BK	SunTop S	welcure	
ΛL		4,0x 4,0					3,0x 3,0 3,0x 3,5 2,6x									XS NE		MO WT SMALL EMO SMALL		Х		DM35ECA/S	SunTop S 868	ALTUS 40 RTS	SONESSE 40 RTS
		3,0x 3,5 2,6x																		X	Х			SUNEA 40 io	
		2,6		ICE		18/1	2,6		11011	T ODEY			DADK		CDEV		NEW		ANTHRACITE BLACK		Х			BLUE	VELLOW
COLLE	ECTION OURS	VSR 240	RAL	RAL	RAL 9001	RAL	RAL 9016	RAL 7035	RAL 9006	RAL	RAL 7037	RAL	RAL	DARK DB	FSM	RAL	RAL 7024	RAL RAI	RAL	RAL 8014	RAL 2016	VSR 780	RED RAL	RAL	RAL 1006
	NSTRUCTION	240	1013	1013	9001	9010	9016	7035	9006	7001	1031	9007	7012	703	71319	7015	7024	7016 702	1 9005	0014	8016	700	3004	5014	1000
	CRANK close to																								
FABRIC		6	5	œ	2	00	00	%	00	Snc	9 NIN	FABI			C COL	OUR AI	UR AND NUMBER			METAL	ISATION	ОТН	IER RA	AL COL	.OUR
		SOLTIS 99	VEROGLIM Acoustics	SUNWORKER	SOLTIS 92	SCREEN 350	SERGE 600	SERGE 1%	SCREEN 550	SCREEN LUMINOUS	H ACRYLIC AWNING EABRICS									5 ×					
		SOLI																	FRONT	BACK					
										Ø	3 m														
SYSTEM	MAX WIDTH	MAX	KIMUM H	EIGHT F	OR GIVEN	FABRIC 500					300									<u> </u>					
XL XLMA XS	400 300 260		350 260						3	350		}													
A3 200				260				12			NK'S CHAIN'S			CKET H P		REMARK									
										R	stan	IGTH Idard) cm	LENGTH (loop) for XL MANUAL				CABLE TIGHTENER Mounted to the floor								
** total exte	ernal dimensi	ons requi						FRONT	ш	은			046		0		CABI								
No.			•	HEIGHT mm		QUANTITY pcs.		DRIVE SIDE	EILING FALLATIO	180) cm) cm	cm 360 cm		LENGTH A 15-36											
							,,,,,		CEILI	220) cm			B 29-50 C 55-76											
1													-						A	*) THE		IAS BEEN INFORMED OF NECESSITY TO INSTALL			
-	2																				PREVE	HE SAFE			
3																		4	\vdash		F STRANG	refers to	XL MA sy	stem	
4																		DELIVER	LECTRIC CONTROL ORDER FORM ATTACHED						
5																			,.	JUNEOU					
7																									
8																									
9																									
10																				eclares that they speak fluent English, ements received and submitted in English,					
-	11																orders subm Terms and C	lers submitted, and to have read and accepted General Sales rms and Conditions, General Warranty Terms and Conditions, chnical-operational documentation and Declaration of							
	12																	performance systems with	for exter motor dr	rnal systems, Declaration of Conformity for rive and information on safety elements					
	13																	installation fo	installation for internal systems operated with cor available at https://www.selt.com/dokumenty-en.						nain,
14																		ORDERI	OMPANY, DATE, SIGNATURE						
15	15																								
16	16																	}							



INFORMATION ON SAFETY ELEMENTS INSTALLATION

Young children can be strangled when the safety device is not installed and adjusted. Read carefully the instructions and install accordingly.

Elements preventing strangulation available at SELT Sp. z o.o.









Chain security grip




Cord ending

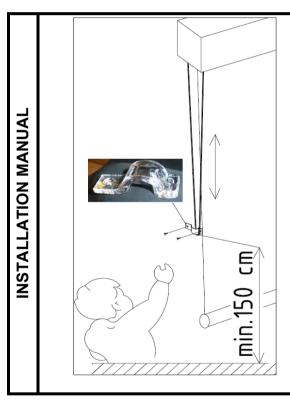

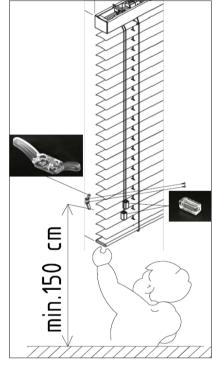

Endings of operation cords were finished with PVC elements (cord endings) to prevent the cords from twisting and creating a loop.



WARNING

- Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product.
- To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck.
- Move beds, cots and furniture away from window covering cords. Do not tie cords together. Make sure cords do not twist.