



Fabrics

Slat Colours

Construction Colours



TABLE OF CONTENTS

| | |
|--------------------------------------|-----------|
| AWNING FABRICS..... | 5 |
| SOLID ACRYLIC FABRICS..... | 8 |
| WATERPROOF ACRYLIC FABRICS..... | 16 |
| ORCHESTRA ACRYLIC FABRICS | 17 |
| URBAN ACRYLIC FABRICS..... | 18 |
| LANDSCAPE MINI ACRYLIC FABRICS | 19 |
| LANDSCAPE ACRYLIC FABRICS..... | 19 |
| CLASSICAL ACRYLIC FABRICS..... | 21 |
| FANTASY ACRYLIC FABRICS..... | 22 |
| | |
| SCREEN FABRICS | 29 |
| SERGE 600..... | 32 |
| SERGE 1%..... | 34 |
| SERGE 600 BO LUNAR | 35 |
| ESSENTIAL 5 (POLYSCREEN 550) | 36 |
| ETHEREAL 10 (POLYSCREEN 350)..... | 38 |
| SILKEN BO (POLYSCREEN 314 BO) | 39 |
| SOLTIS VEOZIP | 40 |
| SOLTIS 92 | 42 |
| SOLTIS® 99 | 43 |
| SUNWORKER | 44 |
| VEROGLIM ACOUSTIC..... | 45 |
| PERGOLA SOLID FABRICS..... | 46 |
| | |
| POWDERCOATING..... | 48 |
| SLAT COLOURS | 50 |
| CONSTRUCTION COLOURS | 52 |



AWNINg FABRICS



100%
ACRYLIC



Above pictograms apply to acrylic fabrics.

ACRYLIC FABRICS

| | | |
|--|-----------------------|---|
| Technical data shown below are average values of the current production Die angegebenen technischen Daten sind Durchschnittswerte der laufenden Produktion Les données techniques ci-dessous sont des valeurs moyennes de la production courante | | |
| ACRYLIC | | |
| Fabric Gewebe Tissu | | Acrylic 100%, solution dyed Acryl 100%, spinndüsengefärbt Acrylique, 100% teint masse |
| Finishing Ausrüstung Traitement | | Teflon - Cleangard |
| Weight Gewicht Poids total | DIN EN 12127 | ~ 300 g/m ² |
| Width Warenbreite Laize | DIN EN 1773 | 120 cm |
| Colour fastness Farbechtheit Solidité des coloris | DIN EN ISO 105-B02 | 7-8 / 8 |
| Light fastness | DIN EN ISO 105-B04 | 7-8/8 |
| Oil repellency Ölabweisung Oléofugation | EN ISO 14419 | 4-5 |
| Water repellency Wasserabweisung Résistance au mouillage superficiel | EN ISO 4920 | 100 |
| Water column Wassersäule Colonne d'eau | EN 20 811 | ~ 330 mm |
| Tensile strength (daN/5 cm) Höchstzugkraft (daN/5 cm) Résistance à la rupture (daN/5 cm) | DIN EN ISO 13934-1 | ~ 140 / 95 |
| Tear resistance (daN) Weft/Warp Weiterreißkraft (daN) Schuss/Kette Résistance à la déchirure (daN) Trame/Chaîne | EN ISO 13937-2 | 2.3 / 4 |

Acrylic fabrics guarantee the highest quality of the product, providing thermal comfort and protection against UV radiation. Made 100% out of acrylic fibre, dyed in chemical solution, provide excellent protection against colour loss. UV resistance coefficient is 7-8 at 8° scale. Impregnation with use of TEFLON® or SCOTCHGARD™ agents provides an excellent protective barrier and strengthens water-repellent qualities of the fabric, also preventing dirt adhering. Resistance to leaking: 330 mm water column. The advantage of acrylic fabric is also high resistance to tensile and tear.

WATERPROOF FABRICS



| | | |
|--|-----------------------|--|
| Technical data shown below are average values of the current production Die angegebenen technischen Daten sind Durchschnittswerte der laufenden Produktion Les données techniques ci-dessous sont des valeurs moyennes de la production courante | | |
| ACRYLIC WATERPROOF | | |
| Fabric Gewebe Tissu | | Acrylic 100%, solution dyed Acryl 100%, spinndüsengefärbt Acrylique 100% teint masse |
| Finishing Ausrüstung Traitement | | Teflon - Cleangard |
| Weight Gewicht Poids total | DIN EN 12127 | ~ 330 g/m ² |
| Width Warenbreite Laize | DIN EN 1773 | 120 cm |
| Colour fastness Farbechtheit Solidité des coloris | DIN EN ISO 105-B02 | 7-8 / 8 |
| Light fastness | DIN EN ISO 105-B04 | 7-8/8 |
| Oil repellency Ölabweisung Oléofugation | EN ISO 14419 | 4-5 |
| Water repellency Wasserabweisung Résistance au mouillage superficiel | EN ISO 4920 | 100 |
| Water column Wassersäule Colonne d'eau | EN 20 811 | ~ 1000 mm |
| Tensile strength (daN/5 cm) Höchstzugkraft (daN/5 cm) Résistance à la rupture (daN/5 cm) | DIN EN ISO 13934-1 | ~ 140 / 95 |
| Tear resistance (daN) Weft/Warp Weiterreißkraft (daN) Schuss/Kette Résistance à la déchirure (daN) Trame/Chaîne | EN ISO 13937-2 | 3 / 4 |

Waterproof acrylic fabrics are characterized by increased resistance to leaking - about 1000 mm water column. Weave structure together with modern impregnation technology provides high air permeability even on hot days. Oeko-Tex® guarantees that offered acrylic fabrics, subjected to special impregnation for water resistance, are not toxic.

SOLID

ACRYLIC FABRICS

BLANCO



2042

UV: 97%



G_{TOT}: 18%

TANDEM BLANCO



8442

UV: 40%



G_{TOT}: 18%

NATURAL



2929

UV: 97%




G_{TOT}: 18%

MARFIL



2143

UV: 97%




G_{TOT}: 16%

SIROCO



2226

UV: 98%




G_{TOT}: 12%

VANILLA



2687

UV: 97%



G_{TOT}: 17%

AMBER BEIGE



0814

UV: 99%




G_{TOT}: 15.66%

BEIGE



2038

UV: 99%



G_{TOT}: 11%

INTEGRAL




2838

UV: 99%



GTOT: 8%

BERNA




2041

UV: 97%



GTOT: 16%

OLIVE GREEN




0007

UV: 97,5%



GTOT: 2%

GRAPHITE MELANGE



0107

UV: 97,5%



GTOT: 2%

ALABASTER



0151

UV: 97,5%




GTOT: 13%

LAGOON



1063

UV: 98%




GTOT: 8%

MARMOL



1070

UV: 98%




GTOT: 7%

RAIN



1073

UV: 99%




GTOT: 16%

SHELL



1469

UV: 97%



GTOT: 16%

TITANE PIGUE



6088

UV: 95%




GTOT: 5%

PLATINUM PIGUE



U407

UV: 95%




G_{TOT}: 3%

ETAIN LINK



U786

UV: 100%




G_{TOT}: 1%

CELESTE LINK



U795

UV: 100%



G_{TOT}: 3%

MAGMA LINK



U808

UV: 95%



G_{TOT}: 13%

AVENA



2296

UV: 98%




G_{TOT}: 11%

LIN MELANGE



8904

UV: 95%



G_{TOT}: 11%

TWEED BROWN




0403

UV: 99%



G_{TOT}: 6.82%

MINERAL



2831

UV: 99%



G_{TOT}: 7%

VISION



2250

UV: 99%



G_{TOT}: 7%

CHAUME PIGUE



U235

UV: 100%



G_{TOT}: 9%

CAFE




2316

UV: 99%



G_{TOT}: 5%

MARBLE



0923

UV: 99%




G_{TOT}: 12.8%

TWEED LATTE



7926

UV: 98%



G_{TOT}: 15%

SNOWFLAKE



3463

UV: 95%




G_{TOT}: 22%

TWEED ARGENT



0794

UV: 98%



G_{TOT}: 19%

DARK LINEN




6727

UV: 98%



G_{TOT}: 18%

SILVER WHITE



0364

UV: 99%



G_{TOT}: 7.67%

SILVER MELANGE



0028

UV: 99%




G_{TOT}: 7.36%

TANDEM PIEDRA




8445

UV: 80%



G_{TOT}: 7%

IRON




0937

UV: 99%



G_{TOT}: 6.57%

TWEED ROCK



7151

UV: 98%



G_{TOT}: 11%

SILVER



2821

UV: 97%




G_{TOT}: 13%

SILVER GREY




U190

UV: 90%



G_{TOT}: 15%

ZIP GREY




1597

UV: 98%




G_{TOT}: 13%

PIETRA BEIGE



9415

UV: 98%



G_{TOT}: 8%

PERLA




2979

UV: 97%



G_{TOT}: 8%

ASH



0638

UV: 99%



G_{TOT}: 5.05%

ANTRACITA



8488

UV: 99%



G_{TOT}: 6%

TANDEM GRAFITO



8446

UV: 80%



G_{TOT}: 6%

EBONY TWEED




7324

UV: 98%



G_{TOT}: 10%

NEGRO




2170

UV: 99%



GTOT: 5%

GRAPHITE ZIP




1524

UV: 98%



GTOT: 12%

BASALT



8203

UV: 100%



GTOT: 5%

FLANELLE




U104

UV: 100%



GTOT: 5%

CHARCOAL TWEED




0402

UV: 99%



GTOT: 5%

STITCH ANDESITE



0512

UV: 98%



GTOT: 8%

STITCH CALCITE



0505

UV: 98%




GTOT: 9%

STITCH RUBY




0507

UV: 98%



GTOT: 9%

WHITE LINEN



8615

UV: 95%



GTOT: 18%

PLATINUM



0715

UV: 90%



GTOT: 12%

BREEZE



2777

UV: 99%



G_{TOT}: 6%

MARINE



2145

UV: 99%



G_{TOT}: 5%

AZUL




2018

UV: 99%



G_{TOT}: 7%

ORANGE



2050

UV: 99%



G_{TOT}: 13%

BRIGHT RED



2211

UV: 99%



G_{TOT}: 10%

RIOJA



2210

UV: 99%



G_{TOT}: 8%

CARMIN PIGUE



U411

UV: 100%




G_{TOT}: 10%

GRANATE



2101

UV: 99%




G_{TOT}: 6%

CURRY



U105

UV: 100%



G_{TOT}: 12%

AMARILLO




2013

UV: 99%



G_{TOT}: 15%

OCRE

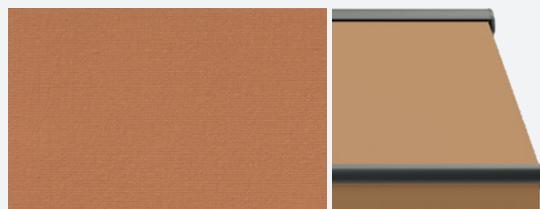


2180

UV: 99%

G_{TOT}: 13%

JADE

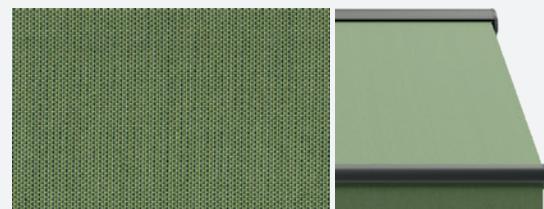


0396

UV: 99%

G_{TOT}: 8.12%

VERDE BOTELLA

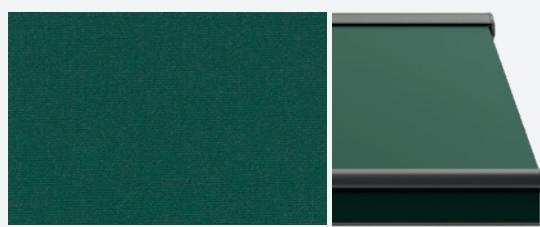

2245

UV: 99%

G_{TOT}: 6%

WATERPROOF


ACRYLIC FABRICS

BLANCO



8268

UV: 97%




G_{TOT}: 18%

MARFIL



8272

UV: 97%




G_{TOT}: 16%

AMARILLO



8265

UV: 99%



G_{TOT}: 15%

COCO




2047

UV: 99%



G_{TOT}: 9%

GRIS



8271

UV: 99%



G_{TOT}: 7%

ANTRACITA



2796

UV: 99%



G_{TOT}: 6%

TWEED NEGRO




2085

UV: 99%



G_{TOT}: 6%

NEGRO



2875

UV: 99%



G_{TOT}: 5%

TOAST WATERPROF




1470

UV: 98%

G_{TOT}: 12%

TWEED GRIS WATERPROF

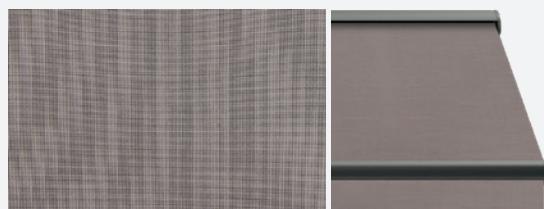

3581

UV: 99%

G_{TOT}: 7%

ECO WEAVE

ACRYLIC FABRICS

MALENCO



3802

UV: 96%

G_{TOT}: 4%

RITTEN



3702

UV: 96%

G_{TOT}: 6%

SECEDA



3401

UV: 96%

G_{TOT}: 7%

MARMOLADA



3101

UV: 96%

G_{TOT}: 10%

LANDSCAPE

ACRYLIC FABRICS

GOBI




4658 UV: 99% GTOT: 11.32% RAPPORT: 24 cm

BEACH




4662 UV: 99% GTOT: 16.37% RAPPORT: 24 cm

SAHARA DUST



4639 UV: 99% GTOT: 10.18% RAPPORT: 24 cm

CLIFFS




4643 UV: 99% GTOT: 6.78% RAPPORT: 24 cm

LADAKH



4655 UV: 99% GTOT: 5.91% RAPPORT: 24 cm

FJORD



4644 UV: 99% GTOT: 7.8% RAPPORT: 24 cm

NAMIB



4640 UV: 99% GTOT: 5.04% RAPPORT: 24 cm

VULCANO



4665 UV: 99% GTOT: 5% RAPPORT: 24 cm

LANDSCAPE MINI


ACRYLIC FABRICS

CLAY





4627 UV: 99% G_{TOT}: 11.3% RAPPORT: 2 cm

SAND



4620 UV: 99% G_{TOT}: 11.4% RAPPORT: 2 cm

GRAVEL




4621 UV: 99% G_{TOT}: 8.1% RAPPORT: 2 cm

ORCHESTRA

ACRYLIC FABRICS

NAPLES LINEN




D307 UV: 95% GTOT: 13% RAPPORT: 20 cm

NAPLES HEATHER




D305 UV: 90% GTOT: 11% RAPPORT: 20 cm

NAPLES LIGHT GREY




D304 UV: 90% GTOT: 11% RAPPORT: 20 cm

NAPLES STONE




D113 UV: 95% GTOT: 7% RAPPORT: 20 cm

PENCIL YELLOW



D323 UV: 95% GTOT: 13% RAPPORT: 30 cm

PENCIL DARK GREY




D319 UV: 100% GTOT: 8% RAPPORT: 30 cm

URBAN

ACRYLIC FABRICS

CANDLELIGHT




0990 UV: 99% G_{TOT}: 14% RAPPORT: 6 cm

CONCRETE



0993 UV: 99% G_{TOT}: 10.8% RAPPORT: 6 cm

TIMBER



0992 UV: 99% G_{TOT}: 9.6% RAPPORT: 6 cm

CLASSICAL

ACRYLIC FABRICS

CLASSICAL GRIS



2103 UV: 97% GTOT: 16% RAPPORT: 20 cm

CLASSICAL AMARILLO



2015 UV: 97% GTOT: 15% RAPPORT: 20 cm

CLASSICAL MOSSY TWEED




9878 UV: 98% GTOT: 15% RAPPORT: 20 cm

CLASSICAL BEIGE




2275 UV: 98% GTOT: 14% RAPPORT: 20 cm

CLASSICAL MARRON-BEIGE



2148 UV: 99% GTOT: 9% RAPPORT: 20 cm

CLASICAL NEGRO



2171 UV: 99% GTOT: 6% RAPPORT: 20 cm

FANTASY


ACRYLIC FABRICS

MILANO



3868 UV: 95% G_{TOT}: 22% RAPPORT: 30 cm

CALGARY

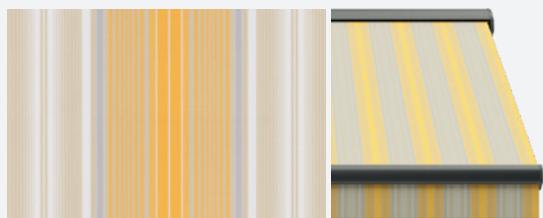

6712 UV: 95% G_{TOT}: 16% RAPPORT: 30 cm

SUNRISE



0180 UV: 99% G_{TOT}: 14.73% RAPPORT: 30 cm

PALERMO



3605 UV: 90% G_{TOT}: 21% RAPPORT: 17 cm

ARGENTINA




2016 UV: 98% G_{TOT}: 15% RAPPORT: 30 cm

CANBERRA



0452 UV: 98.75% G_{TOT}: 15.51% RAPPORT: 24 cm

DAKAR

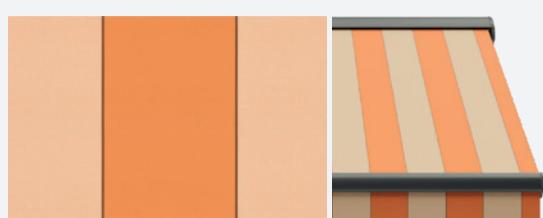

2080 UV: 98% G_{TOT}: 15% RAPPORT: 40 cm

SALERNO




3861 UV: 90% G_{TOT}: 20% RAPPORT: 30 cm

ALBERTA



5106 UV: 98% G_{TOT}: 15% RAPPORT: 30 cm

MANCHESTER

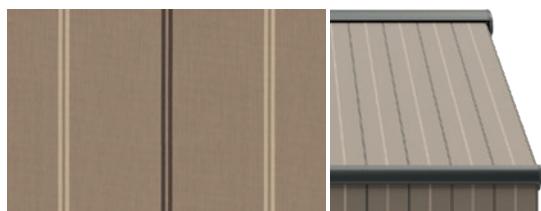

2823 UV: 98% G_{TOT}: 8% RAPPORT: 24 cm

HARDELOT NATURE



8935 UV: 95% G_{TOT}: 14% RAPPORT: 30 cm

SIENNE NATURE



D100 UV: 95% G_{TOT}: 14% RAPPORT: 30 cm

TEXAS



2238 UV: 98% G_{TOT}: 13% RAPPORT: 30 cm

PERU




2201 UV: 98% G_{TOT}: 14% RAPPORT: 30 cm

ANDRIA



3881 UV: 95% G_{TOT}: 18% RAPPORT: 30 cm

MARTE

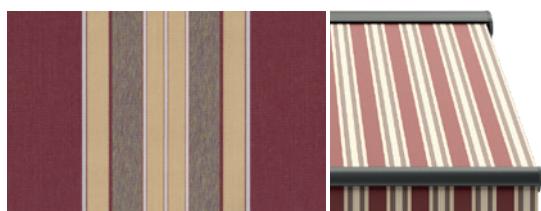


2121 UV: 99% G_{TOT}: 11% RAPPORT: 24 cm

BOLOGNA



3427 UV: 90% G_{TOT}: 22% RAPPORT: 20 cm

JAMAICA

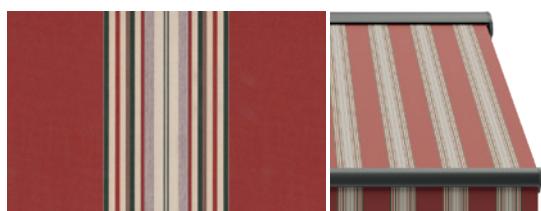

2701 UV: 98% G_{TOT}: 14% RAPPORT: 30 cm

BRISBANE



0186 UV: 98.1% G_{TOT}: 10.26% RAPPORT: 24 cm

EDMONTON



6711 UV: 98% G_{TOT}: 13% RAPPORT: 30 cm

WINTONE




0734 UV: 97.5% G_{TOT}: 12.39% RAPPORT: 24 cm

FOGGIA




3864 UV: 95% G_{TOT}: 18% RAPPORT: 30 cm

BROKEN HILL

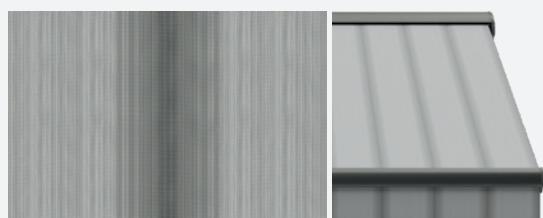

0497 UV: 95% G_{TOT}: 16% RAPPORT: 30 cm

NEW YORK

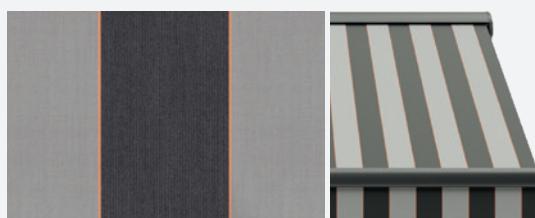

2174 UV: 98% G_{TOT}: 14% RAPPORT: 30 cm

METROPOLITAN



3608 UV: 99% G_{TOT}: 7% RAPPORT: 30 cm

GLADSTONE




0493 UV: 99% G_{TOT}: 7.78% RAPPORT: 24 cm

SIENNE STONE



8931 UV: 95% G_{TOT}: 13% RAPPORT: 30 cm

PLUTON

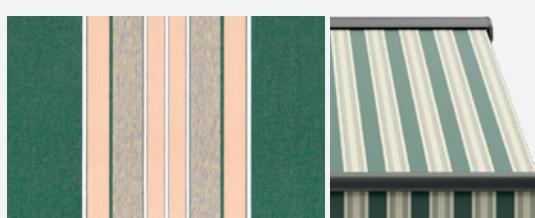


2179 UV: 99% G_{TOT}: 10% RAPPORT: 24 cm

RAVENNA



3882 UV: 95% G_{TOT}: 18% RAPPORT: 30 cm

FIRENZE



3889 UV: 90% G_{TOT}: 20% RAPPORT: 30 cm

MELBOURNE




0054 UV: 99% G_{TOT}: 11.74% RAPPORT: 24 cm

ORLANDO



2191 UV: 98% G_{TOT}: 11% RAPPORT: 30 cm

CANADA



2061 UV: 99% G_{TOT}: 8% RAPPORT: 30 cm


PADOVA



3875 UV: 95% G_{TOT}: 17% RAPPORT: 30 cm

FABRIC RAPPORT

ACRYLIC FABRICS


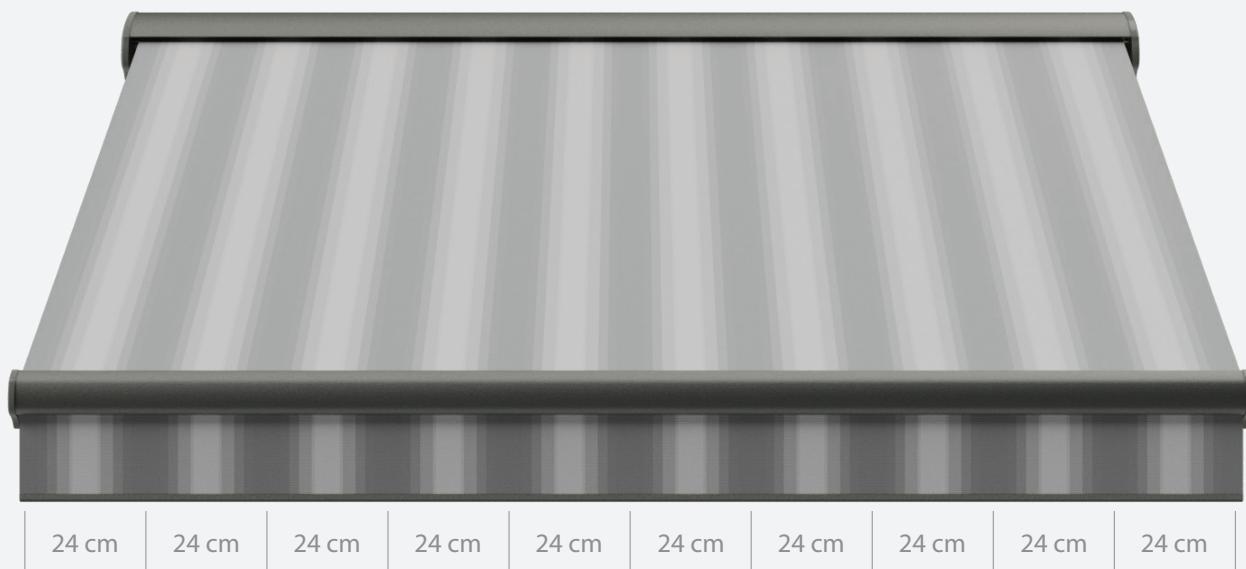


Multiply repeated pattern of fabric,
expressed in cm and given in the chart.





SCREEN FABRICS

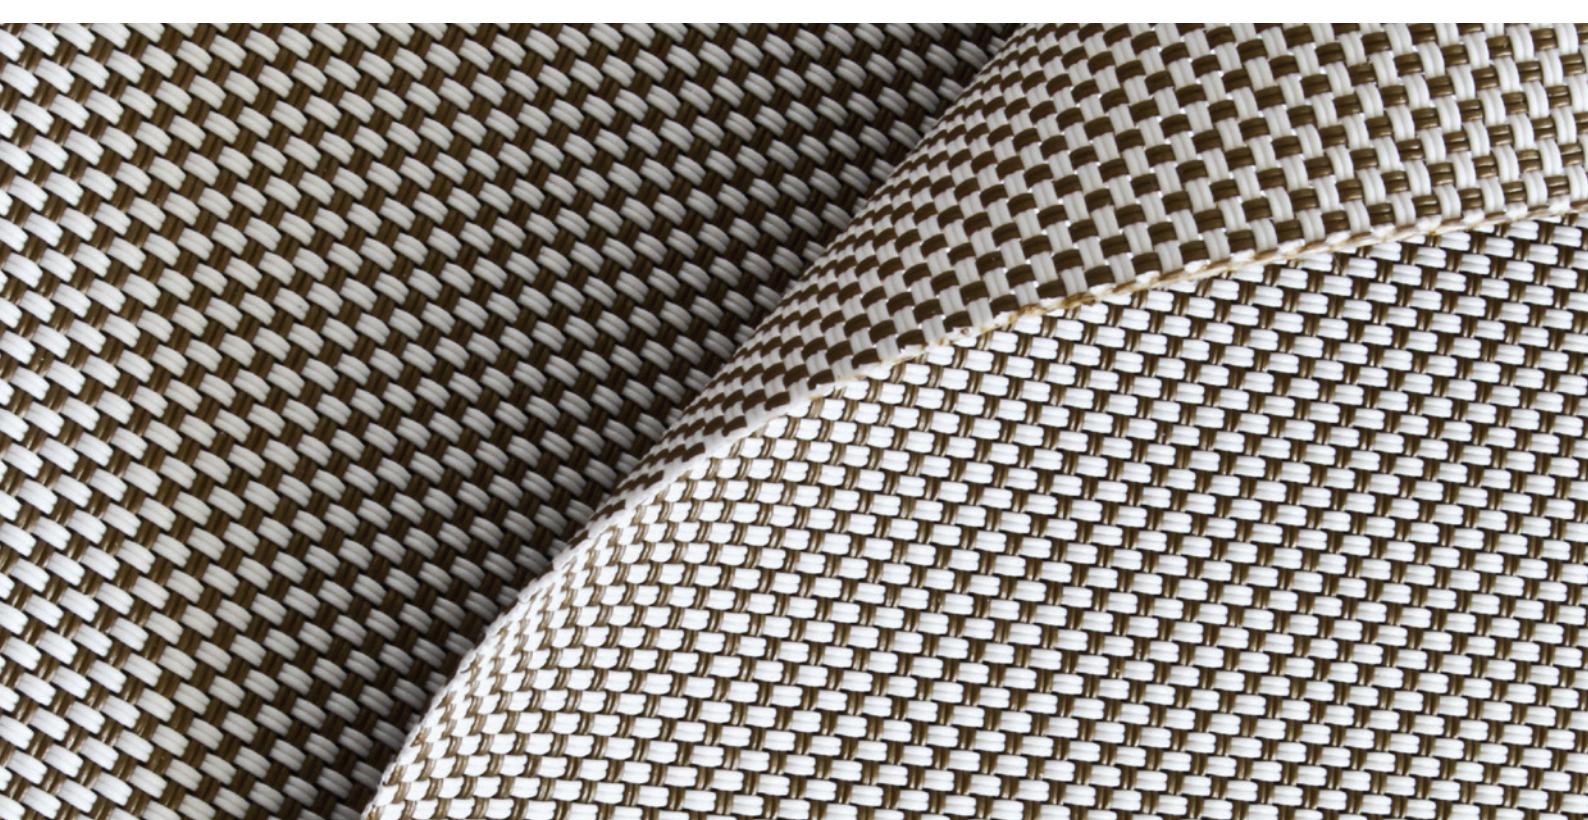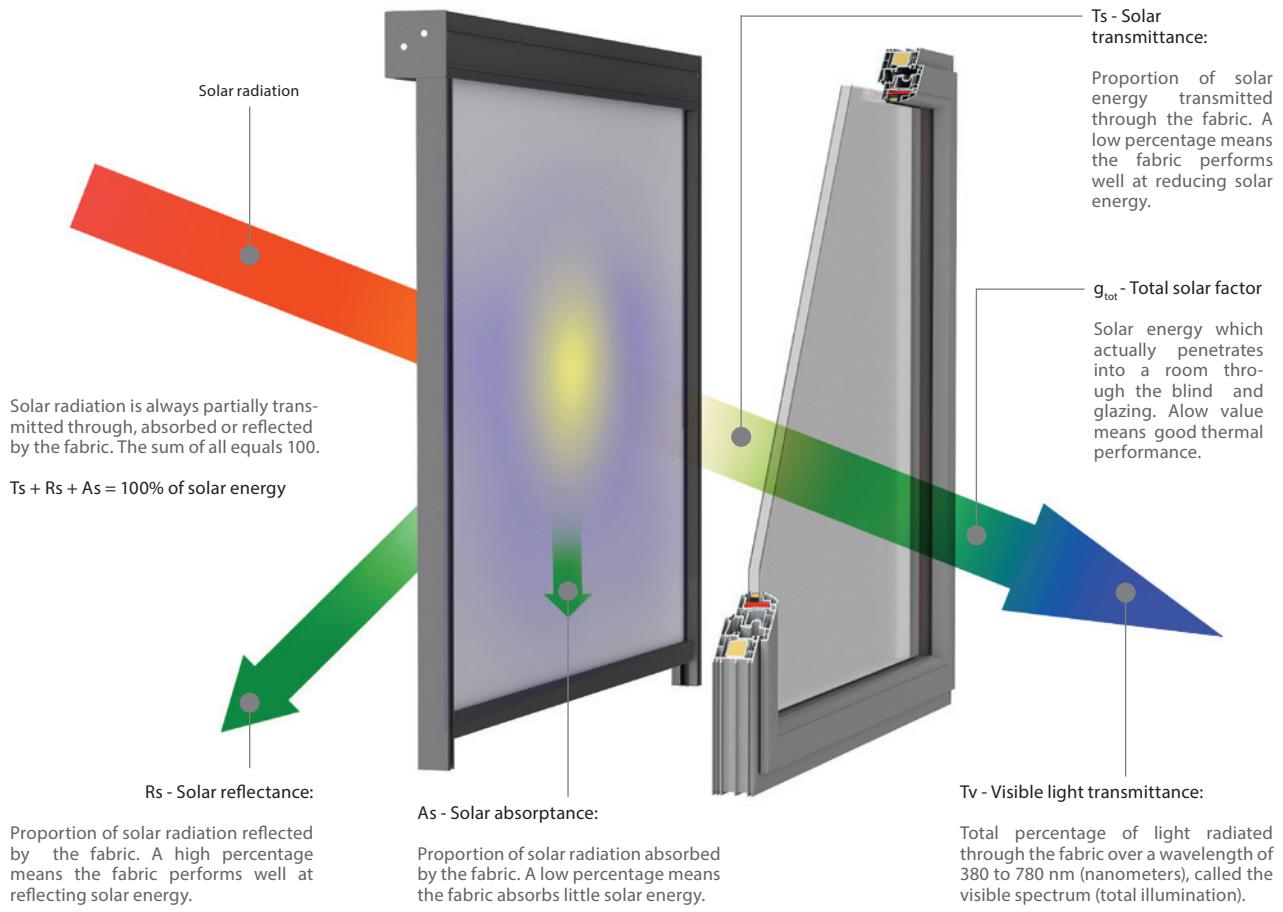

OPENNES FACTOR:

Relative area of the openings in the fabric. It is considered as independent of the colour.
For fabric with the same weave, it should be measured using the darkest colour in the range.

SERGE 1 % / SERGE 600

Collection of fabrics made from fiberglass covered with PVC. Fabrics made of this group have a distinctive diagonal „serge” weave, which guarantees them an unusual dimensional stability. High fire resistance and very good technical parameters of fabrics provide users with visual comfort in rooms, thus protecting against overheating the interior.

POLYSCREEN

Wide group of technical polyester fabrics coated with PVC, characterized by variety of weaving patterns and properties (PS Luminous, PS 550, PS 350). This allows architects to select the right solution, increasing visual attractiveness of the building and to emphasize its individual character. High technical parameters provide optical and thermal comfort inside the room. An additional feature of the fabric is the ease to keep it clean.

BLACK OUT

High-end blackout fabrics (Serge 600 BO Lunar, Polyscreen 314 BO) effectively block sunlight coming into the room. It is ideal solution for conference rooms, audio-visual, photographic studios, etc. High dimensional stability, high technical parameters and interesting colours are without a doubt advantages of fabrics in this group.

SUNWORKER


Smooth polyester fabric finished with PVC. Unique structure of the fabric effectively stops the sunlight, allowing for just optimal amount of visible light to transmit inside the room, providing high comfort to its users. The advantages of this fabric are: color fastness, high resistance to weather conditions and easy to maintain clean.

SOLTIS 92 / SOLTIS 99

Polyester technical fabric coated with PVC, manufactured with patented technology Preconstraint Ferrari®. The unique technology gives fabric high stability and protects it against deformations even in large size blinds. High technical parameters guarantee optical and thermal comfort. The quality components used in production of this fabric ensures color fastness. Thanks to the smooth surface, the fabric is difficult to absorb dirt or get stained.

ACOUSTIC - VEROGLIM

Elegant fabric, made from the highest quality non-flammable polyester fibers Trevira® CS, intended for indoor use. Because of its weight, the fabric is ideally suited for cassette systems. An important advantage of this fabric is high coefficient of acoustics. Thanks to its structure, the fabric absorbs sound and mutes the room. Another advantage is metallic surface that reflects bright light and in this way regulates its intensity in the room.

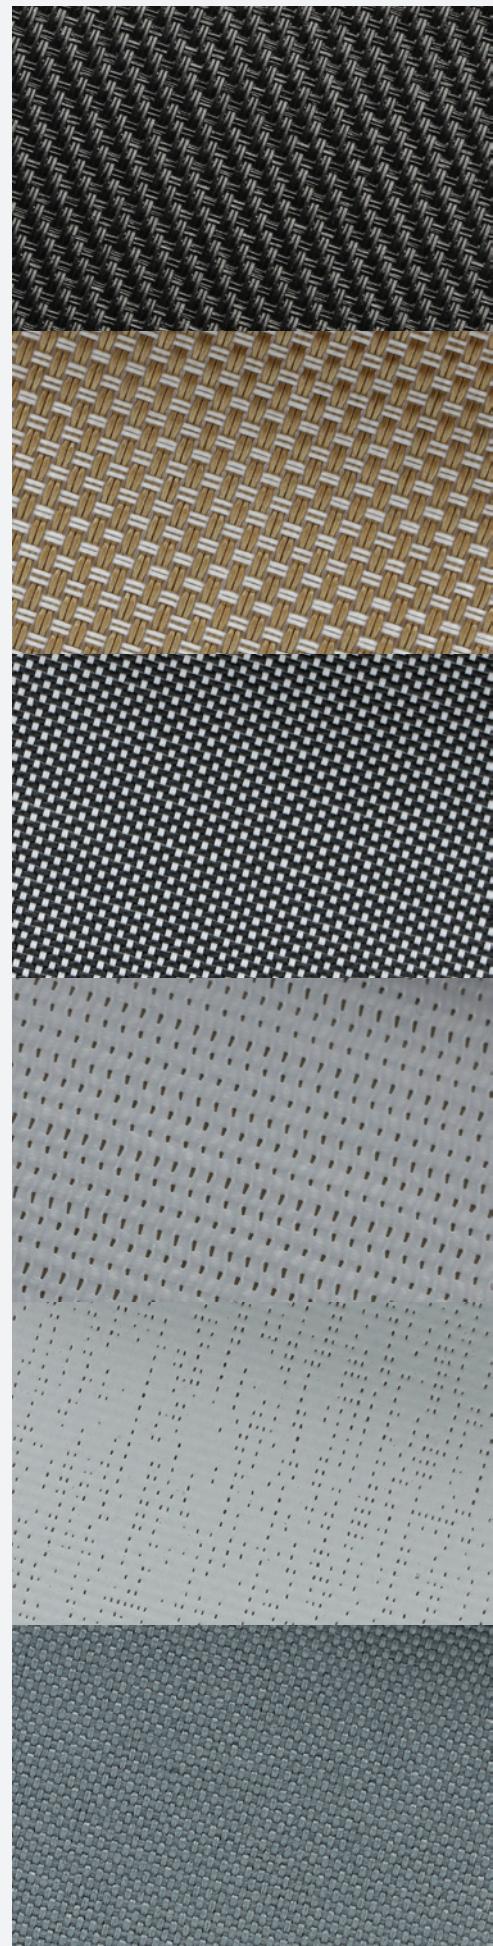

SERGE 600

WHITE - WHITE




60002002

GREY - WHITE



60001002

PEARL - GREY

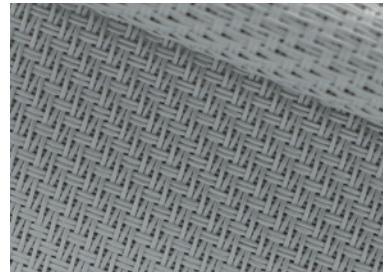

60007007

GREY - GREY



60001001

GREY - CHARCOAL



60001010

CHARCOAL - CHARCOAL



60010010


| | composition 42% glasfibre + 58% pvc | weight [g/m ²] 525 | thickness [mm] 0.74 | light fastness blue scale level EN ISO 105 B02 EN ISO 105 B04 >7 | openness factor [%] 5 | EN 14501 | application interior / exterior |
|--------------------------|--|-----------------------------------|------------------------|--|-----------------------------|-----------|------------------------------------|
| White-White 002002 | | | | | | 21/21 | TS [%] |
| | | | | | | 65.9/66.3 | RS [%] |
| | | | | | | 13.2/12.7 | AS [%] |
| | | | | | | 21.2/21.2 | TV [%] |
| Grey-White 001002 | | | | | | 6.7/6.7 | |
| | | | | | | 37.2/26.9 | |
| | | | | | | 56.2/66.4 | |
| | | | | | | 6.6/6.6 | |
| Pearl-Grey 007007 | | | | | | 10.1/10.1 | |
| | | | | | | 38.3/39.4 | |
| | | | | | | 51.7/50.5 | |
| | | | | | | 8.4/8.4 | |
| Grey-Grey 001001 | | | | | | 3.5/3.5 | |
| | | | | | | 15.1/15.1 | |
| | | | | | | 81.3/81.4 | |
| | | | | | | 3.6/3.6 | |
| Grey-Charcoal 001010 | | | | | | 9.9/12.6 | |
| | | | | | | 86.5/83.8 | |
| | | | | | | 3.6/3.6 | |
| Charcoal-Charcoal 010010 | | | | | | 3.6/3.6 | |
| | | | | | | 5.0/4.8 | |
| | | | | | | 91.4/91.6 | |
| | | | | | | 3.6/3.6 | |

Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 8.5, Weft: 7.5

Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 260, Weft: 225


Certificates: ask for availability

SERGE 600

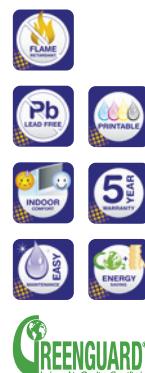

SERGE 600

PURE BLACK

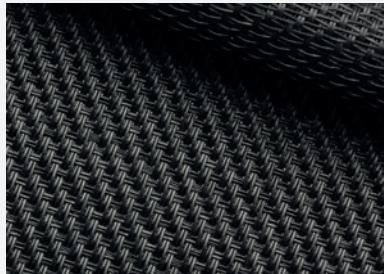


60030030

CHARCOAL - BRONZE




60010011

SANDSTONE

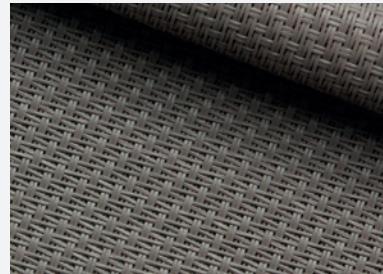

60033033

GREY - SAND

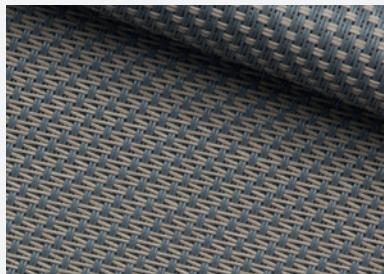

60001003

LINEN - LINEN



60008008

LINEN - WITE




60008002

| | composition | weight [g/m ²] | thickness [mm] | EN 14501 | | | | application |
|------------------------|---------------------------------|----------------------------|----------------|----------|-----------|-----------|--------|---------------------|
| | | | | TS [%] | RS [%] | AS [%] | TV [%] | |
| Pure Black 030030 | 42% glassfibre + 58% pvc 52S | 0.74 | >7 | 5.9 | 3.7 | 90.4 | 5.9 | interior / exterior |
| Charcoal-Bronze 010011 | | | | 6.1 | 6.5/6.0 | 87.4/87.9 | 6.1 | |
| Sandstone 033033 | | | | 7.1 | 20.4/20.5 | 72.4/72.5 | 6.8 | |
| Grey-Sand 001003 | | | | 4.7 | 26.5/21.5 | 68.8/73.8 | 4.5 | |
| Linen-Linen 008008 | | | | 14.9 | 52.5/52.7 | 32.5/32.4 | 12.9 | |
| Linen-White 008002 | | | | 15.5 | 58.2/56.4 | 26.4/28.1 | 13.7 | |

Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 8.5, Weft: 7.5
 Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 260, Weft: 225
 Certificates: ask for availability

SERGE 600

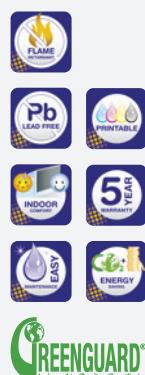

SERGE 1%

WHITE - WHITE




61002002

GREY - WHITE



61001002

PEARL - GREY

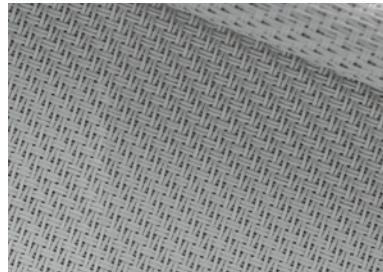


61007007

GREY - GREY




61001001

GREY - CHARCOAL

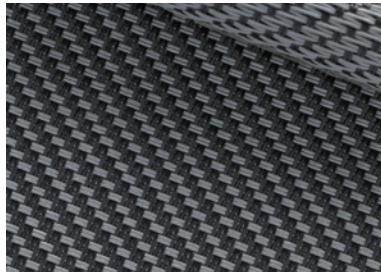


61001010

CHARCOAL - CHARCOAL

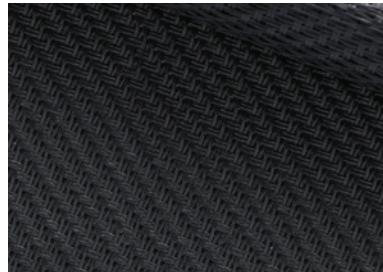

61010010

BRONZE - BRONZE

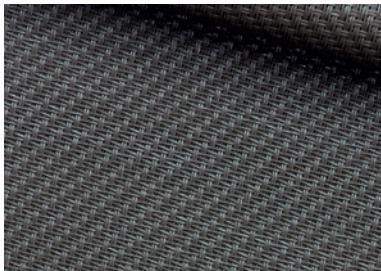

61011011

LINEN - LINEN



61008008

| | composition | weight [g/m ²] | thickness [mm] | openness factor [%] | EN 14501 | | | | application |
|--------------------------|--------------------------|----------------------------|----------------|---------------------|----------|-----------|-----------|--------|-------------|
| White-White 002002 | 42% glassfibre + 58% pvc | 638 | | | TS [%] | RS [%] | AS [%] | TV [%] | |
| Grey-White 001002 | | | | | 12.8 | 71.3 | 15.9 | 12.9 | |
| Pearl-Grey 007007 | | | | | 2.2 | 44.8/31.2 | 53/66.6 | 2 | |
| Grey-Grey 001001 | | | | | 2.8 | 36.9 | 60.3 | 2.1 | |
| Grey-Charcoal 001010 | | | | | 2.4 | 17.4 | 80.2 | 2.2 | |
| Charcoal-Charcoal 010010 | | | | | 1.2 | 10.5/14 | 88.3/84.8 | 1.2 | |
| Bronze-Bronze 011011 | | | | | 1.1 | 5.9 | 93 | 1.1 | |
| Linen-Linen 008008 | | | | | 1.4 | 8.6 | 90 | 1.3 | |
| | | | | | 5.9 | 54.2 | 39.9 | 3.7 | |

Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 5.9, Weft: 6.2

Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 321, Weft: 277

Certificates: ask for availability

SERGE 1%



GREENGUARD
Indoor Air Quality Certified

SERGE 600 BO LUNAR

WHITE - WHITE



6BO002002

WHITE - PERL GREY




6BO002007

PEARL GREY - PEARL GREY




6BO007007

WHITE - GREY

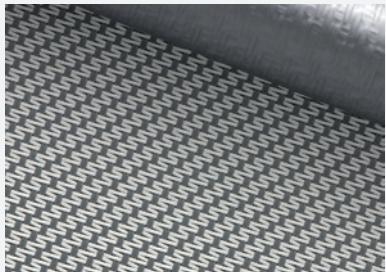

6BO001002

OYSTER SHELL

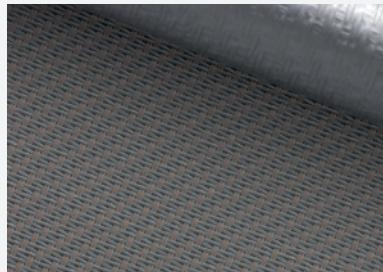


6BO033001

GREY - GREY




6BO001001

GREY - CHARCOAL

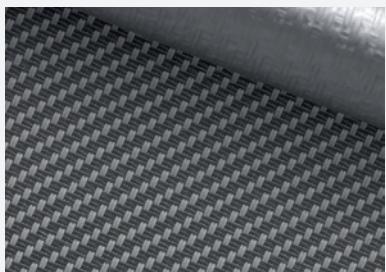

6BO001010

CHARCOAL - CHARCOAL

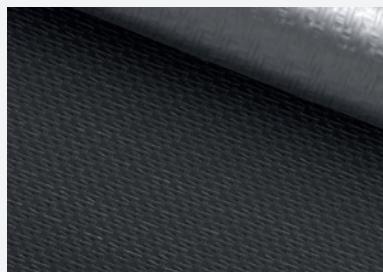


6BO010010

| | composition | weight [g/m ²] | thickness [mm] | light fastness blue scale level EN ISO 105 B02 | EN 14501 | openness factor [%] | application |
|------------------------------|--|----------------------------|----------------|--|----------|------------------------|---------------------|
| White-White 002002 | 33% GLASFIBRE, 47% PVC 20% PVC LAMINATE | 678 | 0.73 | >7 | 0 | 0 | interior / exterior |
| White-Perl Grey 002007 | | | | | TS [%] | RS [%] | |
| Pearl Grey-Pearl Grey 007007 | | | | | AS [%] | A _p [%] | |
| White-Grey 001002 | | | | | TV [%] | | |
| Oyster Shell 033001 | | | | | | | |
| Grey-Grey 001001 | | | | | | | |
| Grey-Charcoal 001010 | | | | | | | |
| Charcoal-Charcoal 010010 | | | | | | | |

Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 8.5, Weft: 9
 Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 224.2, Weft: 176.6
 Certificates: ask for availability

SERGE 600 BO LUNAR

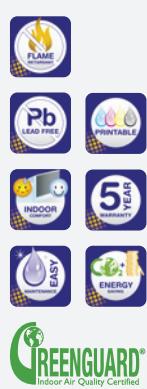

ESSENTIAL 5

(POLYSCREEN 550)

ASH (EBONY - GREY)



10550017

PEARL - GREY




10550013

WHITE - GREY




10550012

WHITE - PEARL

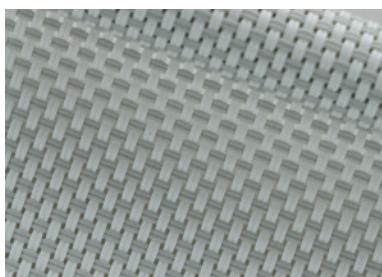


10550011

PEARL - SAND

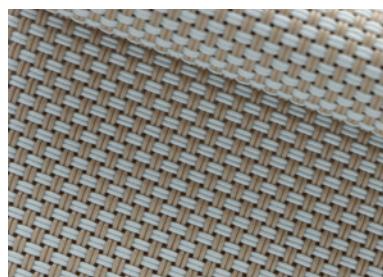

10550023

PEARL - LINEN

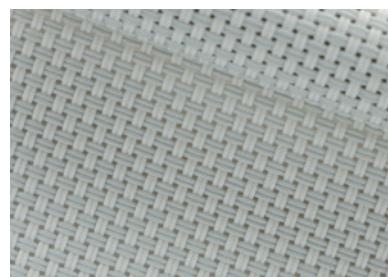

10550021

WHITE - LINEN



10550019

WHITE



10550009

| | composition | weight [g/m ²] | thickness [mm] | light fastness blue scale level EN ISO 105 B02 | light fastness grey scale level EN ISO 4892 | openness factor [%] | internal method | | | | application |
|--------------------|------------------------------|----------------------------|----------------|--|---|---------------------|-----------------|--------|--------|--------|---------------------|
| Ash (Ebony - Grey) | 85% PVC + 15% PES 60 ± 5% | 0.78 ± 5% | 5 | 8/8 | 5/5 | 5 | TS [%] | RS [%] | AS [%] | TV [%] | interior / exterior |
| Pearl - Grey | | | | 8/8 | 5/5 | | 6 | 7 | 87 | 6 | |
| White - Grey | | | | ≥7/8 | ≥4/5 | | 11 | 29 | 60 | 9 | |
| White - Pearl | | | | ≥7/8 | ≥4/5 | | 13 | 37 | 50 | 12 | |
| Pearl - Sand | | | | 8/8 | 5/5 | | 16 | 57 | 27 | 12 | |
| Pearl - Linen | | | | 8/8 | 5/5 | | 14 | 36 | 50 | 10 | |
| White - Linen | | | | ≥7/8 | ≥4/5 | | 17 | 46 | 37 | 12 | |
| White | | | | 7/8 | 4/5 | | 20 | 63 | 17 | 16 | |
| | | | | | | | 19 | 69 | 12 | 15 | |

Tearing resistance (dN) UNE EN ISO 13937-3:2001 - Warp: 6.6, Weft: 5.3
 Breaking strength (dN/5cm) UNE EN ISO 13934-1:1999 - Warp: 174, Weft: 133
 Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 22, Weft: 21
 Certificates: ask for availability

ESSENTIAL 5
(POLYSCREEN 550)



0338

ESSENTIAL 5


(POLYSCREEN 550)

EBONY - GOLD



10550051

LINEN - GOLD

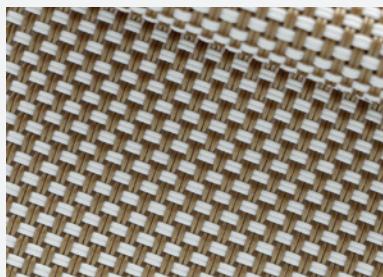

10550053

GREY - SILVER



10550042

COUPAGE 1



10550031

COUPAGE 2



10550032

| | composition | weight [g/m ²] | thickness [mm] | light fastness blue scale level EN ISO 105 B02 | light fastness grey scale level EN ISO 4892 | openness factor [%] | internal method | | | | interior / exterior | application |
|---------------|-------------------|----------------------------|----------------|--|---|------------------------|-----------------|--------|--------|--------|---------------------|-------------|
| | | | | | | | TS [%] | RS [%] | AS [%] | TV [%] | | |
| Ebony - Gold | 85% PVC + 15% PES | 610 ± 5% | 0.78 | 8 / 8 | 5 / 5 | 5 | 11 | 8 | 81 | 10 | | |
| Linen - Gold | | | | | | | 13 | 25 | 62 | 14 | | |
| Grey - Silver | | | | | | | 16 | 17 | 67 | 17 | | |
| Coupage 1 | | | | | | | - | - | - | 10 | | |
| Coupage 2 | | | | | | | - | - | - | 12 | | |

Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp 6.6 , Weft 5.3
 Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp 174, Weft 133
 Stretch (%) UNE EN ISO 13934-1:1999 - Warp 22 , Weft 21
 Certificates: ask for availability

ESSENTIAL 5
(POLYSCREEN 550)




0338

ETHEREAL 10

(POLYSCREEN 350)

ASH (EBONY - GREY)

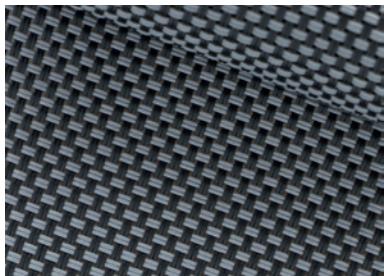

10550017

PEARL - GREY



10550013

WHITE - LINEN



10350019

WHITE



10350009

| | composition | weight [g/m ²] | thickness [mm] | internal method | | | | openness factor [%] | application | |
|--------------------|--------------------------------|----------------------------|----------------|--|---|--------|--------|---------------------|-------------|----------|
| | | | | light fastness blue scale level EN ISO 105 B02 | light fastness grey scale level EN ISO 4892 | TS [%] | RS [%] | AS [%] | TV [%] | |
| Ash (Ebony - Grey) | 80% PVC + 20% PES 4.00 ± 5% | 0.53 ± 5% | 10 | 8 / 8 | 5 / 5 | 10 | 8 | 82 | 10 | interior |
| Pearl - Grey | | | | 8 / 8 | 5 / 5 | 16 | 26 | 58 | 14 | |
| White - Linen | | | | ≥ 7/8 | ≥ 4/5 | 27 | 58 | 15 | 23 | |
| White | | | | 7 / 8 | 4 / 5 | 25 | 64 | 11 | 22 | |

Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp: 5.6, Weft: 5.1

Breaking resistance (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 182, Weft: 152

Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 21, Weft: 19

Certificates: ask for availability

ETHEREAL 10
(POLYSCREEN 350)



0338

SILKEN BO


(POLYSCREEN 314 BO)

EBONY - GREY




10314B20

EBONY - LINEN

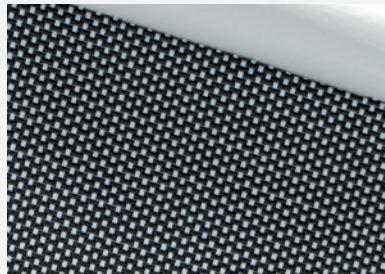


10314B08

LINEN - BRONZE

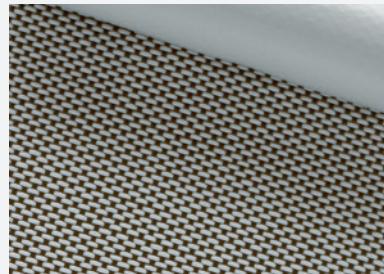


10314B06

WHITE

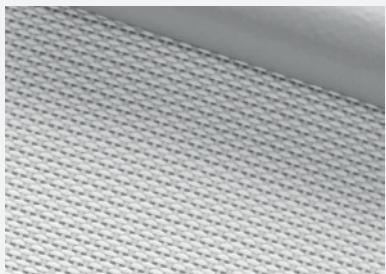


10314B02

LINEN - SAND

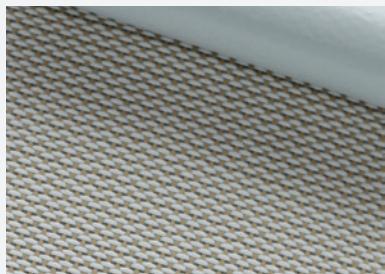

10314B04

EBONY - SAND

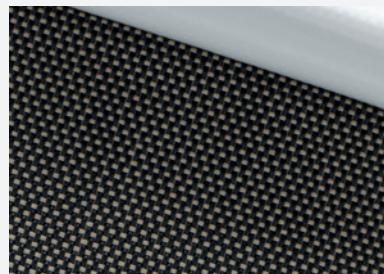

10314B10

| | composition | thickness [mm] | light fastness blue scale level EN ISO 105 B02 | light fastness grey scale level EN ISO 4892 | openness factor [%] | EN 14501 | application |
|----------------|-------------------------------------|----------------|--|---|------------------------|----------|-------------|
| Ebony - Grey | 80% PVC + 20% PE coated with PVC | 610 ± 5% | 8/8 | 4/5 | 0 | TS [%] | interior |
| Ebony - Linen | | | 8/8 | | | RS [%] | |
| Linen - Bronze | | | 8/8 | | | AS [%] | |
| White | | | 7/8 | | | TV [%] | |
| Linen - Sand | | | 8/8 | | | | |
| Ebony - Sand | | | 8/8 | | | | |

Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp: 4.4, Weft: 2.5
 Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 147, Weft: 91
 Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 26.7, Weft: 17.6
 Certificates: ask for availability


SILKEN BO
(POLYSCREEN 314 BO)



0338


SOLTIS VEOZIP

GRAPHITE BLACK

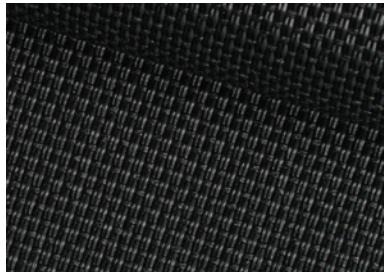

51198

GREY PEPPER

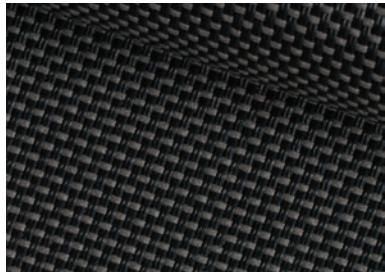

51197

SHADOW



51194

SEA LION



51192

EDELWEISS



51185

| | composition | thickness [mm] | weight [g/m ²] | light fastness grey scale level ISO 105 A02/1935 | openness factor [%] | EN 14501 | | | | interior / exterior application |
|----------------------|--|----------------|----------------------------|--|------------------------|----------|--------|--------|--------|------------------------------------|
| Graphite Black 51198 | 25% Polyester + 74% PVC + 1% Hemp fiber | | | | 4 | TS [%] | RS [%] | AS [%] | TV [%] | |
| Grey Pepper 51197 | | 600 | 0.9 | 5/5 | | 5 | 5 | 90 | 5 | |
| Shadow 51194 | | | | | | 5 | 8 | 87 | 5 | |
| Sea Lion 51192 | | | | | | 5 | 7 | 88 | 5 | |
| Edelweiss 51185 | | | | | | 8 | 13 | 79 | 7 | |
| | | | | | | 9 | 50 | 41 | 8 | |

Tear resistance (daN) DIN 53.363 - Warp: 25, Weft: 25
 Breaking resistance (daN/5cm) EN ISO 1421 - Warp: 250, Weft: 170
 Certificates: ask for availability

SOLTIS VEOZIP




SOLTIS VEOZIP

FROST WHITE




51184

CUMULUS

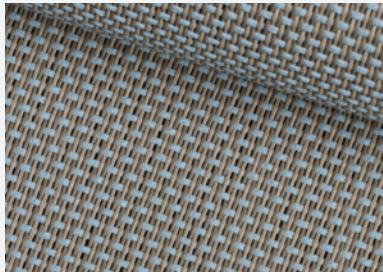


51186

NATURAL

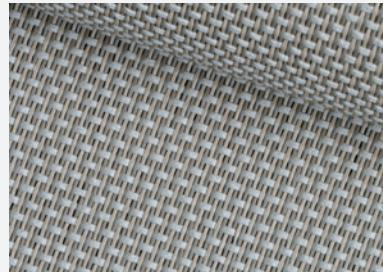


51187

TUNDRA

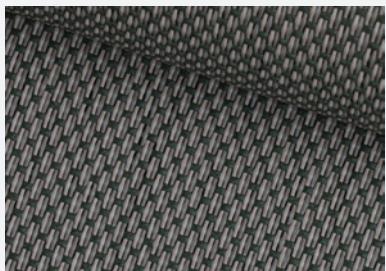

51190

LUNAR SURFACE

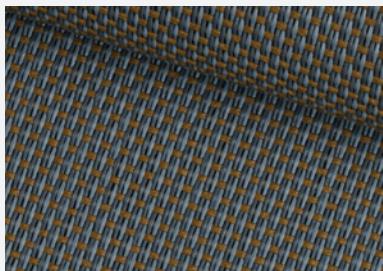

51191

| | | | thickness [mm] | weight [g/m ²] | light fastness grey scale level ISO 05/A02/1993 | openness factor [%] | EN 14501 | | | | interior / exterior application |
|---------------------|---|-----|----------------|----------------------------|---|------------------------|----------|--------|--------|--------|------------------------------------|
| Frost White 51184 | 25% Polyester + 75% PVC composition + 1% Hemp fiber | 600 | 0.9 | | >4/5 | 5 | TS [%] | RS [%] | AS [%] | TV [%] | |
| Cumulus 51186 | | | | | >3/5 | | 6 | 37 | 57 | 6 | |
| Natural 51187 | | | | | 4/5 | | 7 | 37 | 56 | 7 | |
| Tundra 51190 | | | | | 4/5 | | 6 | 27 | 67 | 5 | |
| Lunar Surface 51191 | | | | | 5/5 | | 7 | 18 | 75 | 6 | |


Tear resistance (daN) DIN 53.363 - Warp: 25, Weft: 25
 Breaking resistance (daN/5cm) EN ISO 1421 - Warp: 250, Weft: 170
 Certificates: ask for availability

SOLTIS VEOZIP




SOLTIS 92

DEEP BLACK

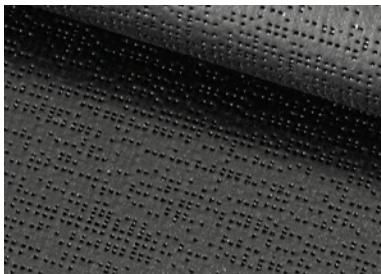

509251176

CHARCOAL

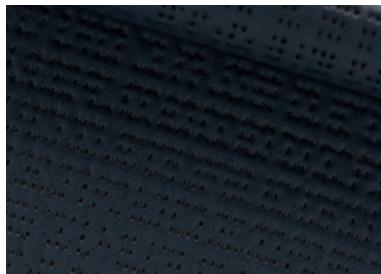


50922047

CONCRETE




50922167

SILVER

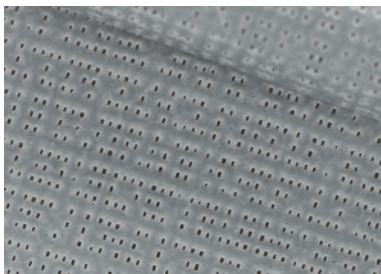

50922048

SILVER BLACK

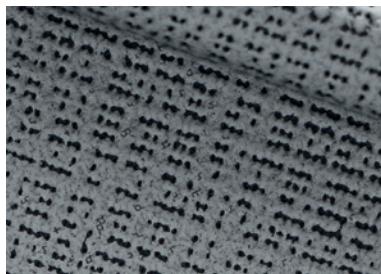

50922045

SILVER - WHITE




50922051

SANDY BEIGE



50922135

WHITE

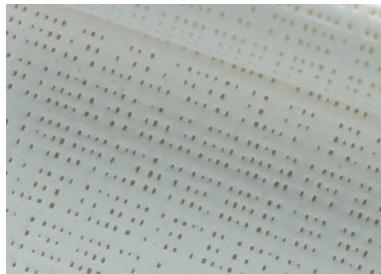

50922044

| composition | weight [g/m ²] | thickness [mm] | light fastness grey scale level ISO 105 A02/1993 | openness factor [%] | EN 14501 | | | | interior / exterior application |
|-------------------|----------------------------|----------------|--|------------------------|----------|--------|--------|--------|------------------------------------|
| | | | | | TS [%] | RS [%] | AS [%] | TV [%] | |
| Deep Black 51176 | Polyester/PVC | 420 | 5/5 | 5 | 3 | 5 | 92 | 3 | |
| Charcoal 2047 | | | 5/5 | 5 | 5 | 8 | 87 | 5 | |
| Concrete 2167 | | | 4/5 | 6 | 19 | 75 | 5 | | |
| Silver 2048 | | | 4/5 | 8 | 46 | 46 | 8 | | |
| Silver Black 2045 | | | 5/5 | 4 | 35 | 61 | 4 | | |
| Silver-White 2051 | | | 4/5,3-4/5 | 12/12 | 49/70 | 39/18 | 11/11 | | |
| Sandy Beige 2135 | | | 5/5 | 11 | 46 | 43 | 8 | | |
| White 2044 | | | 3-4/5 | 19 | 68 | 13 | 17 | | |


Tear strength (daN) DIN 53.363 - Warp: 45, Weft: 20
Tensile strength (daN/5cm) EN ISO 1421 - Warp: 310, Weft: 210
Certificates: ask for availability

SOLTIS 92



SOLTIS 99

WHITE

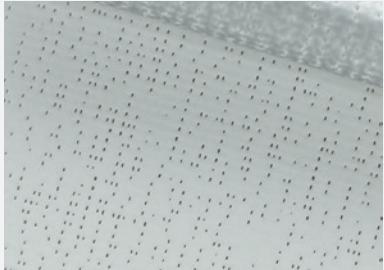

50992055

QUARTZ




509950285

SANDY BEIGE



509950286

SPUME

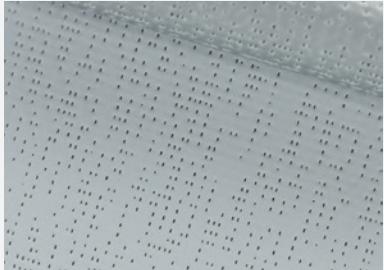


509950284

LIGHT GREY



50992058

ALU

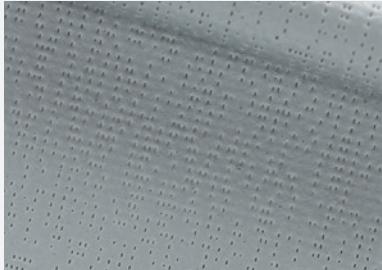

50992059

ANTRACITE



50992068

| | composition | weight [g/m ²] | thickness [mm] | light fastness grey scale level ISO 105 A02/1993 | openness factor [%] | EN 14501 | | | | application |
|-------------------|-----------------|----------------------------|----------------|--|------------------------|----------|---------|---------|----|-------------|
| White 2055 | Polyester / PVC | 290 | 0.32 | 5/5, 3-4/5 | 3 | 14/14 | 47 / 63 | 39 / 23 | 13 | interior |
| Quartz 50285 | | | | 5/5, 5/5 | | 11 / 11 | 47 / 60 | 42 / 29 | 9 | |
| Sandy Beige 50286 | | | | 5/5, 5/5 | | 10 / 10 | 43 / 44 | 47 / 46 | 7 | |
| Spume 50284 | | | | 5/5, 4-5/5 | | 12 / 12 | 47 / 60 | 41 / 28 | 9 | |
| Light Grey 2058 | | | | 5/5, 5/5 | | 8 / 8 | 44 / 43 | 48 / 49 | 6 | |
| Alu 2059 | | | | 5/5, 5/5 | | 6 | 43 | 51 | 5 | |
| Antracite 2068 | | | | 5/5, 5/5 | | 3 / 3 | 33 / 8 | 64 / 89 | 3 | |


Tear strength (daN) DIN 53.363 - Warp: 11, Weft: 13
Tensile strength (daN/5cm) EN ISO 1421 - Warp: 160, Weft: 170
Certificates: ask for availability

SOLTIS 99




SUNWORKER

WHITE

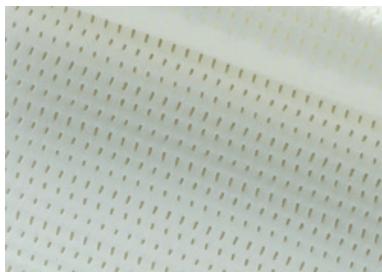

40SWK005

IRON

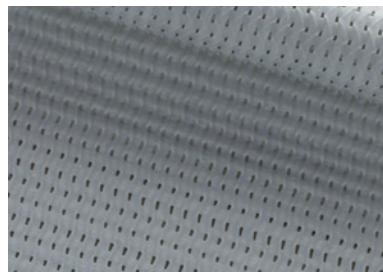


40SWK653

CHAMPAGNE



40SWK711

CHARCOAL

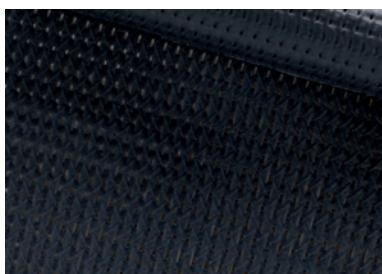

40SWK392

| | composition | weight [g/m ²] | thickness [mm] | light fastness blue scale level EN ISO 105 B02 | light fastness grey scale level EN ISO 105 B04 | openness factor [%] | EN 14501 | | | | interior / exterior | application |
|------------------|-----------------|----------------------------|----------------|--|--|---------------------|----------|--------|--------|--------|---------------------|-------------|
| White SWK005 | Polyester / PVC | 300 | 0.42 | 7 / 8 | 4-5 / 5 | 6 | TS [%] | RS [%] | AS [%] | TV [%] | | |
| Iron SWK653 | | | | | | 6 | 23 | 66 | 11 | 21 | | |
| Champagne SWK711 | | | | | | 6 | 12 | 35 | 53 | 10 | | |
| Charcoal SWK392 | | | | | | 6 | 21 | 50 | 29 | 18 | | |
| | | | | | | 6 | 6 | 7 | 87 | 6 | | |

Tearing strength (daN/5cm) DIN 53.363 - Warp: 43, Weft: 22
Tensile strength (daN/5cm) NF EN ISO 13934-1 - Warp: 220, Weft: 150
Certificates: ask for availability

SUNWORKER



GARANTIE
5
JAHRE

SYSTEM
LOWICK

VEROGLIM ACOUSTIC

GREY - SILVER




34022115

LIGHT GREY - SILVER




34022114

WHITE - SILVER

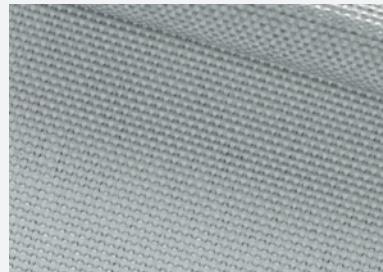

34022111

IVORY - SILVER

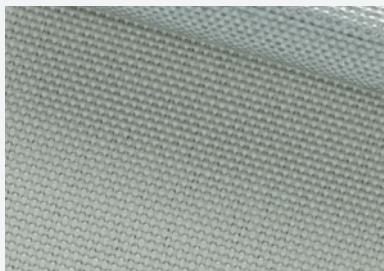

34022113

| | composition | weight [g/m ²] | thickness [mm] | lightfastness blue scale level EN ISO DS B02 | openness factor [%] | DIN EN 410 | | | | application |
|-----------------------|-------------|----------------------------|----------------|--|---------------------|------------|--------|--------|--------|-------------|
| | | | | | | TS [%] | RS [%] | AS [%] | TV [%] | |
| Grey-Silver 115 | Trevira CS | 220 | 0.43 | 5-6 / 8 | 1 | 5 | 50 | 45 | 2 | interior |
| Light Grey-Silver 114 | | | | | | 5 | 52 | 43 | 4 | |
| White-Silver 111 | | | | | | 7 | 52 | 41 | 7 | |
| Ivory-Silver 113 | | | | | | 6 | 49 | 45 | 6 | |

Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 95, Weft: 130
 Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 35, Weft: 23
 Certificates: ask for availability

VEROGLIM ACOUSTIC



PERGOLA SOLID FABRICS



PRECONSTRAINT 602 OPAQUE

Technical specifications

| | Values | Standards |
|-----------------------------------|---|---------------|
| Yarn | 1100 dtex PES HT | Tersuisse |
| Weight | 750 g/m ² | EN ISO 2286-2 |
| Width | 267 cm | - |
| Tensile strength (warp/weft) | 230/220 daN/5cm | EN ISO 1421 |
| Tear strength (warp/weft) | 20/20 daN | DIN 53.363 |
| Elongation under load (warp/weft) | <1%/<1% | NF EN 15619 |
| Adhesion | 9/9 daN/5cm | EN ISO 2411 |
| Finish | Varnish both sides | - |
| Flame retardancy | • M2/NFP 92-507 • B1/DIN4102-1 • M2/UNE23.727-90 • BS 7837 • 1530.3/AS NZS • Method 2/NFPA 701 • CSFM T19 • | |
| Cold resistance | -30°C | ISO 4675 |
| Heat resistance | +70°C | |

BLANC 602N OPAQUE 8503



BEIGE 602N OPAQUE 0020




PRECONSTRAINT 702 OPAQUE


Technical specifications

| | Values | Standards |
|------------------------------|--|---------------|
| Yarn | 1100 dtex PES HT | Tersuisse |
| Weight | 830 g/m ² | EN ISO 2286-2 |
| Width | 267 cm | |
| Tensile strength (warp/weft) | 280/280 daN/5 cm | EN ISO 1421 |
| Tear strength (warp/weft) | 30/28 daN | DIN 53.363 |
| Adhesion | 10/10 daN/5 cm | EN ISO 2411 |
| Finish | Acrylic varnish both sides Aluminium face / Back grey | |
| Flame retardancy | M2/NFP 92-507 • TEST 2/NFPA 701 • CSFM T19 • B1/DIN 4102-1 • BS 7837 • GROUP 1/AS/NZS 3837 • 1530.3/AS/NZS • SITAC/SIS 650082 • Schwerbrennbar Q1-Tr1/ONORM A 3800-1 • CLASSE 2/UNI 9177-87 • M2/UNE 23.727-90 • VKF 5.2/SN 198898 • B-s2,do/EN 13501-1 | |
| Cold resistance | -30°C | |
| Heat resistance | +70°C | |

ALU WHITE 702 OPAQUE 1284

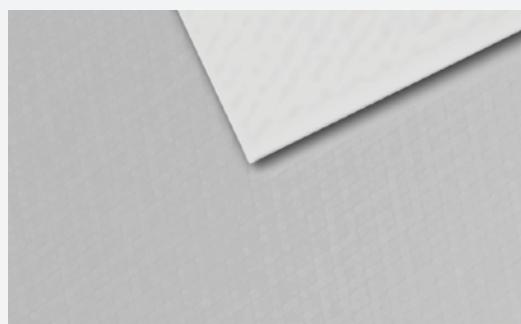


ALU GREY 702 OPAQUE 1285

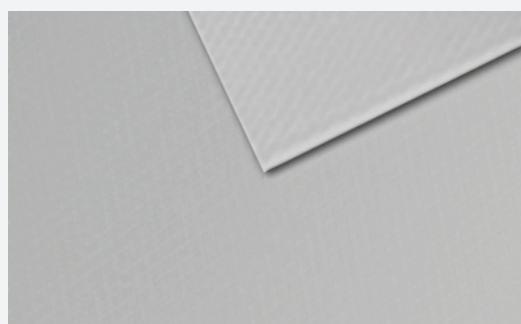

SELT COLOURS

COATING FINISH

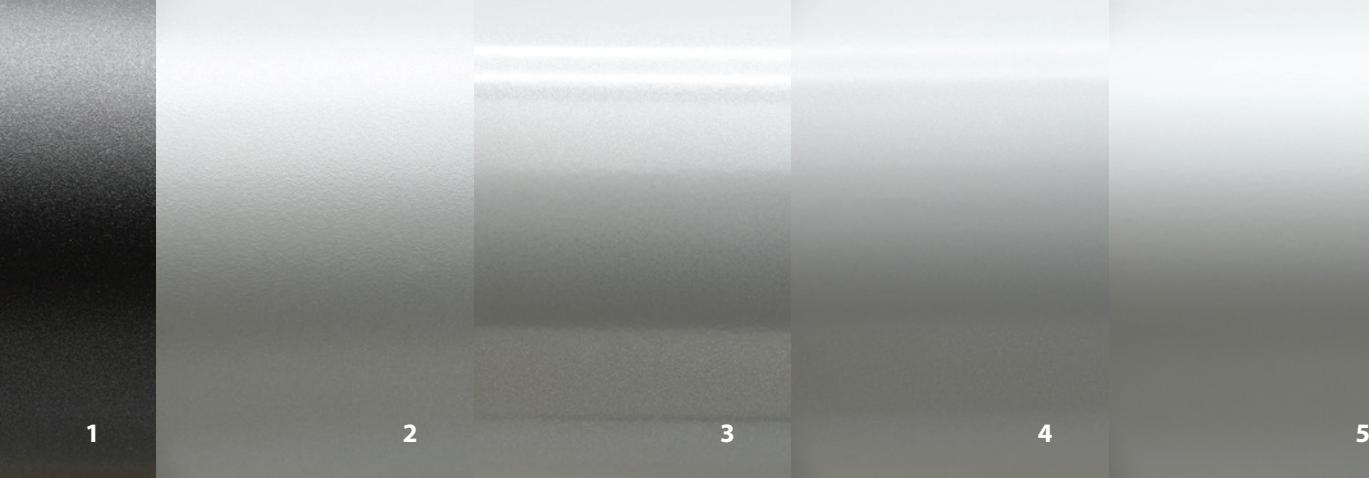

1 2 3 4 5

1. "fine structure - pearl mat"
2. "fine structure"
3. *satin finish*
4. *mat finish*
5. "artificial anode"

CONSTRUCTION COLOURS

Presented colour chart shows colours available within Selt collection for powder coated construction elements of Refleksols, venetian blinds and sunbreakers. Conditions of painting in colours included in the collection below and in other RAL colours – according to rules described in price lists of individual products. Because of technical and production reasons as well as due to different coating techniques, differences in colours between product components are possible. Presented pictures are for illustration purposes only. Colours may vary from actual ones. Any difference in shade does not constitute grounds for complaint.

SLATS COLOURS

Presented colour chart shows slat colours available within SELT collection. Conditions of painting in colours within Selt collection and other RAL colours – according to rules described in price list of venetian blinds. Because of technical and production reasons as well as due to different coating techniques, differences in colours between product components are possible. Presented pictures are for illustration purposes only. Colours may vary from actual ones. Any difference in shade does not constitute grounds for complaint. Customized perforation (layout and size of openings) and painting in colours outside of SELT collection are subject to individual arrangements in terms of price and conditions of implementation.



Jotun Protects Property



Powderful Solutions




szwajcarska jakość

SLAT COLOURS

C50 / C80 / C80F / Z90

RAL 1013



C80 / Z90

RAL 7012



C80 / Z90

RAL 7016



C50 / C80 / C80F / Z90

RAL 7021



C80 / Z90

RAL 7024



C80 / Z90

RAL 7035




C80 / Z90

RAL 8014



C80 / Z90

RAL 9005



C80 / Z90

RAL 9006



C50 / C80 / C80F / Z90

RAL 9007



C50 / C80 / C80F / Z90

RAL 9010



C50 / C80 / C80F / Z90

RAL 9016



C80

DB 703




C80 / Z90

VSR 240



C80 / Z90

VSR 780



C80 / Z90

SLAT COLOURS


C50 SLIM

0005 (~ RAL 1013)




C50 SLIM

0204 (~ RAL 9003)



C50 SLIM

0030



C50 SLIM

0038 (~ RAL 9006)




C50 SLIM

9007 (~ RAL 9007)



C50 SLIM

2901




C50 SLIM

0199 (~ RAL 7024)




C50 SLIM

0019 (~ RAL 9011)




C50 SLIM

0204 PF (~ RAL 9003)



C50 SLIM


0038 PF (~ RAL 9006)




C50 SLIM

CONSTRUCTION COLOURS

RAL 1013 MAT



RAL 1015 MAT



RAL 7001 MAT



RAL 7012 MAT



RAL 7015 MAT




RAL 7016 MAT



RAL 7021 MAT



RAL 7022 MAT



RAL 7024 MAT



RAL 7035 MAT



RAL 7037 MAT



RAL 7039 MAT




RAL 7043 MAT



RAL 8003 MAT



RAL 8014 MAT

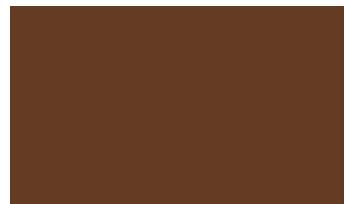


CONSTRUCTION COLOURS


RAL 8016 MAT



RAL 9001 MAT



RAL 9005 MAT




RAL 9006 MAT




RAL 9007 MAT



RAL 9010 MAT



RAL 9016 MAT




DB 703 MAT




VSR 240 SATIN



VSR 780 MAT



FSM 71319 MAT





SELT

COMPANY

All specifications, design and color of products are up to date at time of forwarding this catalogue to print. The manufacturer reserves the right to make changes without prior notice. Due to the printing process any color reproductions are for illustration purposes only, their deviation from the actual color cannot constitute grounds for complaint. Folder reproduction in whole or in part is forbidden without the written permission of SELT.