

ZIIP with Zoomtech Technology


Removing the roller tube from the ZIIP system

1. Unscrew and remove the revision cover
2. Unroll the material from the roller tube (two options):
 - a. Unroll the material from the tube while winding it onto the bottom bar.
 - b. Remove the bottom bar from the fabric, the fabric is rolled up
 - c. When the fabric is fully unrolled, slide it out of the groove of the roller tube, starting from one edge of the tube
 - d.




- **NOTE.** In order not to soil the fabric, the cardboard from the packaging can be used.

3. Removal of roller tube from cassette (minimum 2 people recommended) :
 - a. Screw the grub screw into the telescopic end bearing, fig
 - b. Push the end bearing towards the roller tube so that it comes out of the fixing
 - c. Tilt the tube to remove it from the cassette

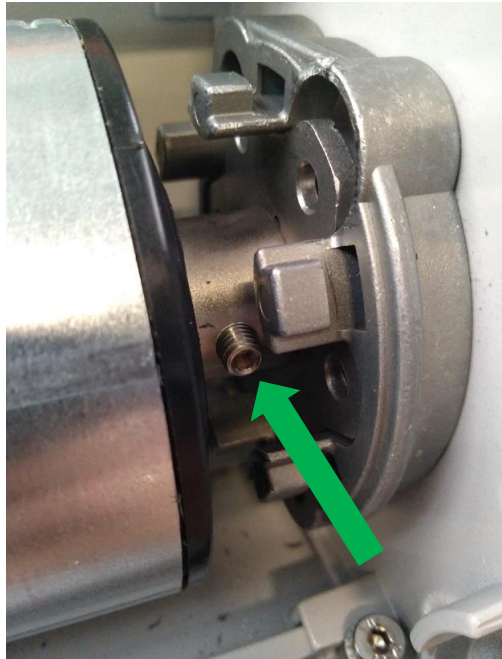


d. On the motor side, pull off the motor protection pict.

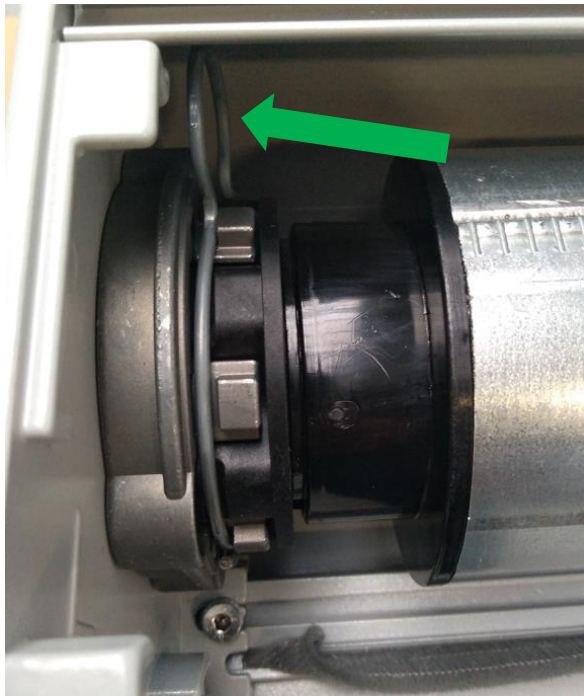

e. Put the removed roller tube in a safe place

- **ATTENTION** With the tube pulled off, please do not start the motor so as not to change the position of the end bearing.

After mounting of the cassette (additional screwing of the cassette as shown in the drawing is recommended) and the guides

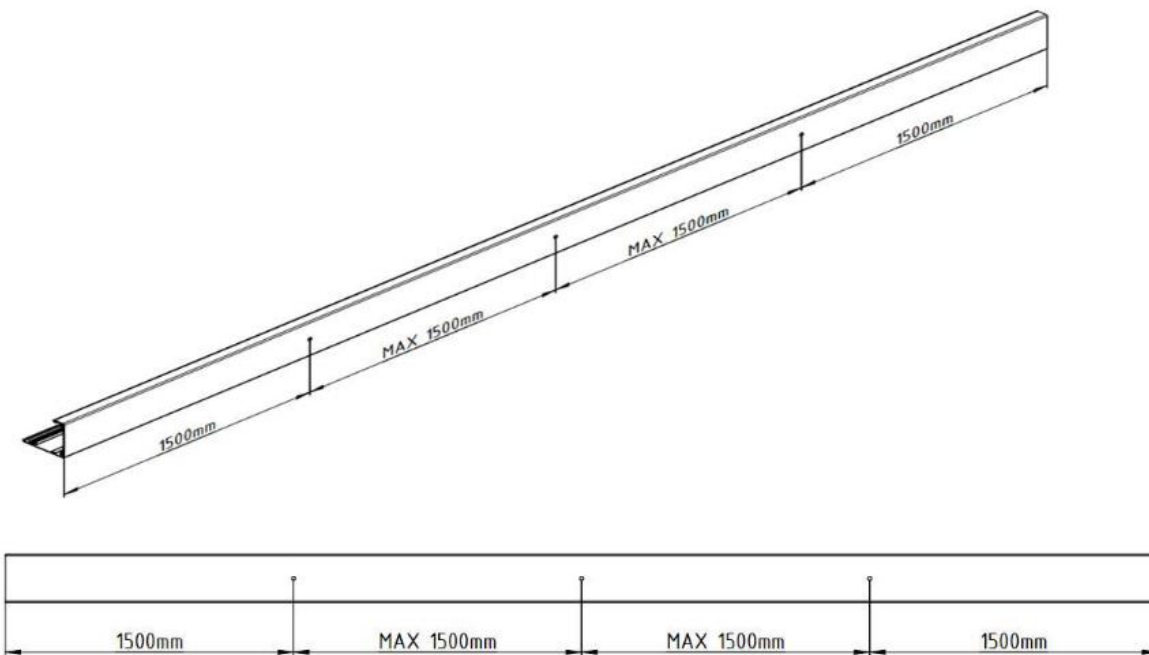

Inserting a roller tube into the ZIIP system

1. Insert the tube from the side where the motor is located, in the same way as it was removed.
2. Then insert the end bearing side, to insert the tube you need to push the bearing towards the tube and seat it in the mount.

NOTE - the grub screw after inserting the end bearing into the mount must be pointing vertically downwards, as it was before the roller tube was pulled off, and the roller tube should be bent towards the top of the cassette.

3. Remove the screw securing the end bearing to prevent it from falling out of its mount.
4. Then attach the fabric to the roller tube by clicking the click profile into the roller tube groove.
5. The fabric should be centred, from the edge of the fabric (the place without the zipper) to the collar of the winding tube adapter the distance should be 16mm, fig.



6. Wind the fabric onto the roller tube using the motor.
7. Insert the bottom bar (if it was removed).

- 8. Set motor end positions**
- 9. Insert the guide profiles, screw on the moving part of the guides and the cassette revision.**